

# NOTICE OF DECISION

PLANNING DIVISION  
555 LIBERTY ST. SE, RM 305  
SALEM, OREGON 97301  
PHONE: 503-588-6173  
FAX: 503-588-6005



*Si necesita ayuda para comprender esta información, por favor llame 503-588-6173*

## DECISION OF THE PLANNING ADMINISTRATOR

### CLASS 1 DESIGN REVIEW

APPLICATION NO.: 24- 108977-PLN

NOTICE OF DECISION DATE: May 23, 2024

**REQUEST:** A Class 1 Design Review for a railing and siding replacement for all buildings within an existing multiple family complex. The subject property is 6.37 acres in size and zoned RM-II (Multiple Family Residential) and located at 4154 Sunnyview Road NE (Marion County Assessor Map and Tax Lot 072W19BA / 5200).

**APPLICANT:** Sonja Ramos

**LOCATION:** 4154 Sunnyview Road NE

**FINDINGS:** The findings are in the attached Decision dated May 23, 2024

**DECISION:** The **Planning Administrator APPROVED** the application based upon the submitted materials and the findings as presented in the decision.

The rights granted by the attached decision, which are effective as of the date of this decision, must be exercised by May 23, 2026, or this approval shall be null and void.

Case Manager: Abigail Pedersen, Planner I, [apedersen@cityofsalem.net](mailto:apedersen@cityofsalem.net), 503-540-2309

This decision is final; there is no local appeal process. Any person with standing may appeal this decision by filing a "Notice of Intent to Appeal" with the Land Use Board of Appeals, 775 Summer St NE, Suite 330, Salem OR 97301, **not later than 21 days** after **May 23, 2024**. Anyone with questions regarding filing an appeal with the Oregon Land Use Board of Appeals should contact an attorney.

The following items are submitted to the record: 1) All materials and evidence submitted by the applicant, including any applicable professional studies; and 2) All materials, evidence, and comments from City Departments and public agencies. The application materials are available on the City's online Permit Application Center at <https://permits.cityofsalem.net>. To view the materials without registering, you may use the search function and enter the permit number listed here: 24-108977-PLN.

<http://www.cityofsalem.net/planning>

**BEFORE THE PLANNING ADMINISTRATOR OF THE CITY OF SALEM**

**DECISION**

<b>IN THE MATTER OF APPROVAL OF</b>	<b>) FINDINGS &amp; ORDER</b>
<b>CLASS 1 DESIGN REVIEW</b>	<b>)</b>
<b>23-108977-PLN</b>	<b>)</b>
<b>4154 SUNNYVIEW ROAD NE</b>	<b>) May 23, 2024</b>

In the matter of the application for a Class 1 Design Review, the Planning Administrator, having received and reviewed the evidence and application materials, makes the following findings, and adopts the following order as set forth herein.

**REQUEST**

A Class 1 Design Review for a railing and siding replacement for all buildings within an existing multiple family complex. The subject property is 6.37 acres in size and zoned RM-II (Multiple Family Residential) and located at 4154 Sunnyview Road NE (Marion County Assessor Map and Tax Lot 072W19BA / 5200). A vicinity map of the subject property is included as **Attachment A**.

**PROCEDURAL FINDINGS**

1. On April 25, 2024, an application for a Class 1 Design Review was submitted for property located at 4154 Sunnyview Road NE.
2. After additional requested information was provided by the applicant, the application was deemed complete on May 15, 2024.

**SUBSTANTIVE FINDINGS**

**1. Proposal**

A Class 1 Design Review for a siding and railing replacement for all eighteen multiple family buildings at 4154 Sunnyview Road NE. Railing replacement includes like for like replacement as well as the removal of pony walls located on the side of second floor balconies and replacing them with railings. The applicant is proposing a section of a distinguishing color, known as a belly band, between the first and second floor. The proposed development plans are included as **Attachment B**.

**DECISION CRITERIA FINDINGS**

**2. Class 1 Design Review Approval Criteria**

The purpose of Design Review is to create a process to review development applications that are subject to design review guidelines and design review standards.

SRC 225.005(e)(1) provides that a Class 1 Design Review shall be approved if all of the applicable design review standards are met.

Except as provided under SRC 702.005(b), and unless otherwise provided in the UDC, design review under SRC chapter 225 is required for all multiple family development.

A summary of the applicable design standards of SRC Chapter 702 is included below:

*SRC 702.020 - Design Review Standards for Multiple Family Development with Thirteen or More Units.*

(a) *Open Space Standards.*

- (1) To encourage the preservation of natural open qualities that may exist on a site and to provide opportunities for active and passive recreation, all newly constructed multiple family developments shall provide a minimum 30 percent of the gross site area in designated and permanently reserved open space. For the purposes of this subsection, the term "newly constructed multiple family developments" shall not include multiple family developments created through only construction or improvements to the interior of an existing building(s). Indoor or covered recreation space may count toward this open space requirement.
- (A) To ensure usable open space that is of sufficient size, at least one common open space area shall be provided that meets the size and dimension standards set forth in Table 702-3.

TABLE 702-3. COMMON OPEN SPACE AREA SIZE AND DIMENSIONS		
Number of Dwelling Units	Minimum Open Space Area Size	Minimum Horizontal Dimension
13 to 20	750 sq. ft.	25 ft.
More than 20	1,000 sq. ft., plus an additional 250 sq. ft. for every 20 units, or portion thereof, over 20 units.	25 ft.

- (B) To ensure the provided open space is usable, a maximum of 15 percent of the common open space shall be located on land with slopes greater than 25 percent.
- (C) To allow for a mix of different types of open space areas and flexibility in site design, private open space, meeting the size and dimension standards set forth in Table 702-4, may count toward the open space requirement. All private open space must meet the size and dimension standards set forth in Table 702-4.

TABLE 702-4. PRIVATE OPEN SPACE SIZE AND DIMENSIONS		
Location of Dwelling Unit	Minimum Open Space Area Size	Minimum Dimension
Not more than 5 feet above finished grade	96 sq. ft.	6 ft.
More than 5 feet above finished grade	48 sq. ft.	6 ft.

- (D) To ensure a mix of private and common open space in larger developments, private open space, meeting the size and dimension standards set forth in Table 702-4, shall be provided for a minimum of 20 percent of the dwelling units in all newly constructed multiple family developments with 20 or more dwelling units. Private open space shall be located contiguous to the dwelling unit, with direct access to the private open space provided through a doorway.
- (E) To encourage active recreational opportunities for residents, the square footage of an improved open space area may be counted twice toward the total amount of required open space, provided each such area meets the standards set forth in this subsection. Example: a 750-square-foot improved open space area may count as 1,500 square feet toward the open space requirement.
  - (i) Be a minimum 750 square feet in size with a minimum dimension of 25 feet for all sides; and
  - (ii) Include at least one of the following types of features:
    - a. Covered pavilion.
    - b. Ornamental or food garden.
    - c. Developed and equipped children's play area, with a minimum 30-inch tall fence to separate the children's play area from any parking lot, drive aisle, or street.
    - d. Sports area or court (e.g., tennis, handball, volleyball, basketball, soccer).
    - e. Swimming pool or wading pool.
- (F) To encourage proximity to and use of public parks, the total amount of required open space may be reduced by 50 percent for developments that are located within one-quarter mile of a public urban, community, or neighborhood park as measured along a route utilizing public or private streets that are existing or will be constructed with the development.

**Finding:** The proposal is for a siding and railing replacement for an existing multiple family complex. No changes are proposed to the square footage of the existing buildings, to existing off-street parking or vehicle use areas, or to existing common open space areas, common or private. This standard does not apply to the proposed development.

(b) *Landscaping standards.*

- (1) To encourage the preservation of trees and maintain or increase tree canopy, a minimum of one tree shall be planted or preserved for every 2,000 square feet of gross site area.
- (2) Where a development site abuts property that is zoned Residential Agricultural (RA) or Single Family Residential (RS), a combination of landscaping and screening shall be provided to buffer between the multiple family development and the abutting RA or RS zoned property. The landscaping and screening shall include the following:
  - (A) A minimum of one tree, not less than 1.5 inches in caliper, for every 30 linear feet of abutting property width; and

- (B) A minimum six-foot tall, decorative, sight-obscuring fence or wall. The fence or wall shall be constructed of materials commonly used in the construction of fences and walls, such as wood, stone, rock, brick, or other durable materials. Chain link fencing with slats shall be not allowed to satisfy this standard.
- (3) To define and accentuate primary entryways, a minimum of two plant units, shall be provided adjacent to the primary entryway of each dwelling unit, or combination of dwelling units.
- (4) To soften the visual impact of buildings and create residential character, new trees shall be planted, or existing trees shall be preserved, at a minimum density of ten plant units per 60 linear feet of exterior building wall. Such trees shall be located not more than 25 feet from the edge of the building footprint.
- (5) Shrubs shall be distributed around the perimeter of buildings at a minimum density of one plant unit per 15 linear feet of exterior building wall.
- (6) To ensure the privacy of dwelling units, ground level private open space shall be physically and visually separated from common open space with perimeter landscaping or perimeter fencing.
- (7) To provide protection from winter wind and summer sun and to ensure trees are distributed throughout a site and along parking areas, a minimum of one canopy tree shall be planted along every 50 feet of the perimeter of parking areas. Trunks of the trees shall be located within ten feet of the edge of the parking area (see Figure 702-3).
  - (A) A minimum of one canopy tree shall be planted within each planter bay.
  - (B) A landscaped planter bay a minimum of nine feet in width shall be provided at a minimum spacing of one for every 12 spaces. (see Figure 702-3).
- (8) Multiple family developments with 13 or more units are exempt from the landscaping requirements in SRC chapter 806.

**Finding:** The proposal is for a siding and railing replacement for an existing multiple family complex. No changes are proposed to the square footage of the existing buildings, to existing off-street parking or vehicle use areas, or to existing common open space areas, common or private. This standard has been met.

(c) *Site safety and security.*

- (1) Windows shall be provided in all habitable rooms, other than bathrooms, on each wall that faces common open space, parking areas, and pedestrian paths to encourage visual surveillance of such areas and minimize the appearance of building bulk.
- (2) Lighting shall be provided that illuminates all exterior dwelling unit entrances, parking areas, and pedestrian paths within the development to enhance visibility and resident safety.
- (3) Fences, walls, and plant materials shall not be installed between street-facing dwelling units and public or private streets in locations that obstruct the visibility of dwelling unit entrances from the street. For purposes of this standard, the term

"obstructed visibility" means the entry is not in view from the street along one-half or more of the dwelling unit's frontage.

- (4) Landscaping and fencing adjacent to common open space, parking areas, and dwelling unit entryways shall be limited to a maximum height of three feet to encourage visual surveillance of such areas.

**Finding:** The proposal is for a siding and railing replacement for an existing multiple family complex. No changes are proposed to the existing windows, lighting, landscaping. The proposed replacement of railings like for like and half walls with railings does not obstruct visibility. This standard has been met.

(d) *Parking and site design.*

- (1) To minimize large expanses of continuous pavement, parking areas greater than 6,700 square feet in area shall be physically and visually separated with landscaped planter bays that are a minimum of nine feet in width. Individual parking areas may be connected by an aisle or driveway (see Figure 702-3).
- (2) To minimize the visual impact of on-site parking and to enhance the pedestrian experience, off-street surface parking areas and vehicle maneuvering areas shall be located behind or beside buildings and structures. Off-street surface parking areas and vehicle maneuvering areas shall not be located between a building or structure and a street.
- (3) Where a development site abuts, and is located uphill from, property zoned Residential Agriculture (RA) or Single Family Residential (RS), and the slope of the development site within 40 feet of the abutting RA or RS zoned property is 15 percent or greater, parking areas shall be set back not less than 20 feet from the property line of the abutting RA or RS zoned property to ensure parking areas are designed to consider site topography and minimize visual impacts on abutting residential properties.
- (4) To ensure safe pedestrian access to and throughout a development site, pedestrian pathways shall be provided that connect to and between buildings, common open space, and parking areas, and that connect the development to the public sidewalks.

**Finding:** The proposal is for a siding and railing replacement for an existing multiple family complex. No expansion or alteration is proposed to the existing off-street parking areas. This standard does not apply to the proposed development.

(e) *Façade and building design.*

- (1) To preclude long monotonous exterior walls, buildings shall have no dimension greater than 150 feet.
- (2) Where a development site abuts property zoned Residential Agricultural (RA) or Single Family Residential (RS), buildings shall be setback from the abutting RA or RS zoned property as set forth in Table 702-5 to provide appropriate transitions between new buildings and structures on site and existing buildings and structures on abutting sites.

TABLE 702-5. SETBACKS ABUTTING PROPERTY ZONED RA AND RS	
Number of Building Stories	Minimum Setback
1	Min. 1 foot for each 1 foot of building height, but in no case less than 14 ft.
2 or more	Min. 1 foot for each 1 foot of building height, but in no case less than 20 ft.

- (A) A 5-foot reduction is permitted to each required setback in Table 702-5 provided that the height of the required fence in Sec. 702.020(b)(2)(B) is increased to eight feet tall.
- (3) To enhance compatibility between new buildings on site and abutting residential sites, balconies located on building facades that face RA or RS zoned properties, unless separated by a street, shall have fully sight-obscuring railings.
  - (4) On sites with 75 feet or more of buildable width, a minimum of 40 percent of the buildable width shall be occupied by building placed at the setback line to enhance visual interest and activity along the street. Accessory structures shall not apply towards meeting the required percentage.
  - (5) To orient buildings to the street, any ground-level unit, cluster of units, interior lobbies, or portions thereof, located within 25 feet of the property line abutting a street shall have a building entrance facing that street, with direct pedestrian access to adjacent sidewalks.
  - (6) A porch or architecturally defined entry area shall be provided for each ground level dwelling unit. Shared porches or entry areas shall be provided to not more than four dwelling units. Individual and common entryways shall be articulated with a differentiated roof, awning, stoop, forecourt, arcade or portico.
  - (7) Roof-mounted mechanical equipment, other than vents or ventilators, shall be screened from ground level view. Screening shall be as high as the top of the mechanical equipment and shall be integrated with exterior building design.
  - (8) To reinforce the residential character of the neighborhood, flat roofs, and the roof ridges of sloping roofs, shall not exceed a horizontal length of 100 feet without providing differences in elevation of at least four feet in height. In lieu of providing differences in elevation, a cross gable or dormer that is a minimum of four feet in length may be provided. (See Figure 702-4)
  - (9) To minimize the appearance of building bulk, each floor of each building's vertical face that is 80 feet in length or longer shall incorporate one or more of the design elements below (see examples in Figure 702-5). Design elements shall vary from other wall surfaces by a minimum of four feet and such changes in plane shall have a minimum width of six feet.
    - (A) Offsets (recesses and extensions).
    - (B) Covered deck.
    - (C) Covered balcony.
    - (D) Cantilevered balcony provided at least half of its depth is recessed.
    - (E) Covered entrance.

- (10) To visually break up the building's vertical mass, the first floor of each building, except for single-story buildings, shall be distinguished from its upper floors by at least one of the following (see examples in Figure 702-6):
- (A) Change in materials.
  - (B) Change in color.
  - (C) Molding or other horizontally-distinguishing transition piece.

**Finding:** The proposal is for a siding and railing replacement for all 18 buildings of a multiple family complex. The standards identified in SRC 702.020 (1-2 or 4-9) do not apply to this proposal as no changes are proposed to the number or location of buildings, setbacks, patios, decks, balconies, roofs, or entrances.

The removal of pony walls and replacement with railing complies SRC 702.020(e)(3) as the balconies are not located on building facades that face RA or RS zoned properties.

The applicant is proposing to replace the existing siding with similar siding material and proposes a change in trim color on all buildings with a second floor, to break up the building's vertical mass, consistent with SRC 702.020(10). The applicant is proposing the siding be a gray and the distinguishing piece be a white. As proposed, the development meets this standard.

#### **4. Conclusion**

Based on conformance with the preceding requirements, the Planning Administrator finds that the proposed Class 1 Design Review is in conformance with the UDC and the approval criteria provided in SRC 225.005(e)(1), provided compliance occurs with any applicable items noted above.

Please Note: Findings included in this decision by the direction of the Salem Fire Department are based on non-discretionary standards. Fire Code related findings are intended to inform the applicant of the clear and objective Fire Prevention Code standards of SRC Chapter 58 that will apply to this development proposal on application for building permit(s). Additional or different Fire Prevention Code standards may apply based on the actual building permit application submitted.

If a building permit application has not already been submitted for this project, please submit a copy of this decision with your building permit application for the work proposed.

#### **IT IS HEREBY ORDERED**

The proposed Class 1 Design Review is consistent with the provisions of SRC Chapter 225 and is hereby APPROVED subject to the applicable standards of the Salem Revised Code and the findings contained herein.






Abigail Pedersen, Planner I, on behalf of  
Lisa Anderson-Ogilvie, AICP  
Planning Administrator

Attachments:       A) Vicinity Map  
                          B) Development Plans

G:\CD\PLANNING\CASE APPLICATION Files 2011-On\DESIGN REVIEW (Class 1)\2023\24-108977-PLN.arp.docx

# Vicinity Map

## 4154 Sunnyview Road NE

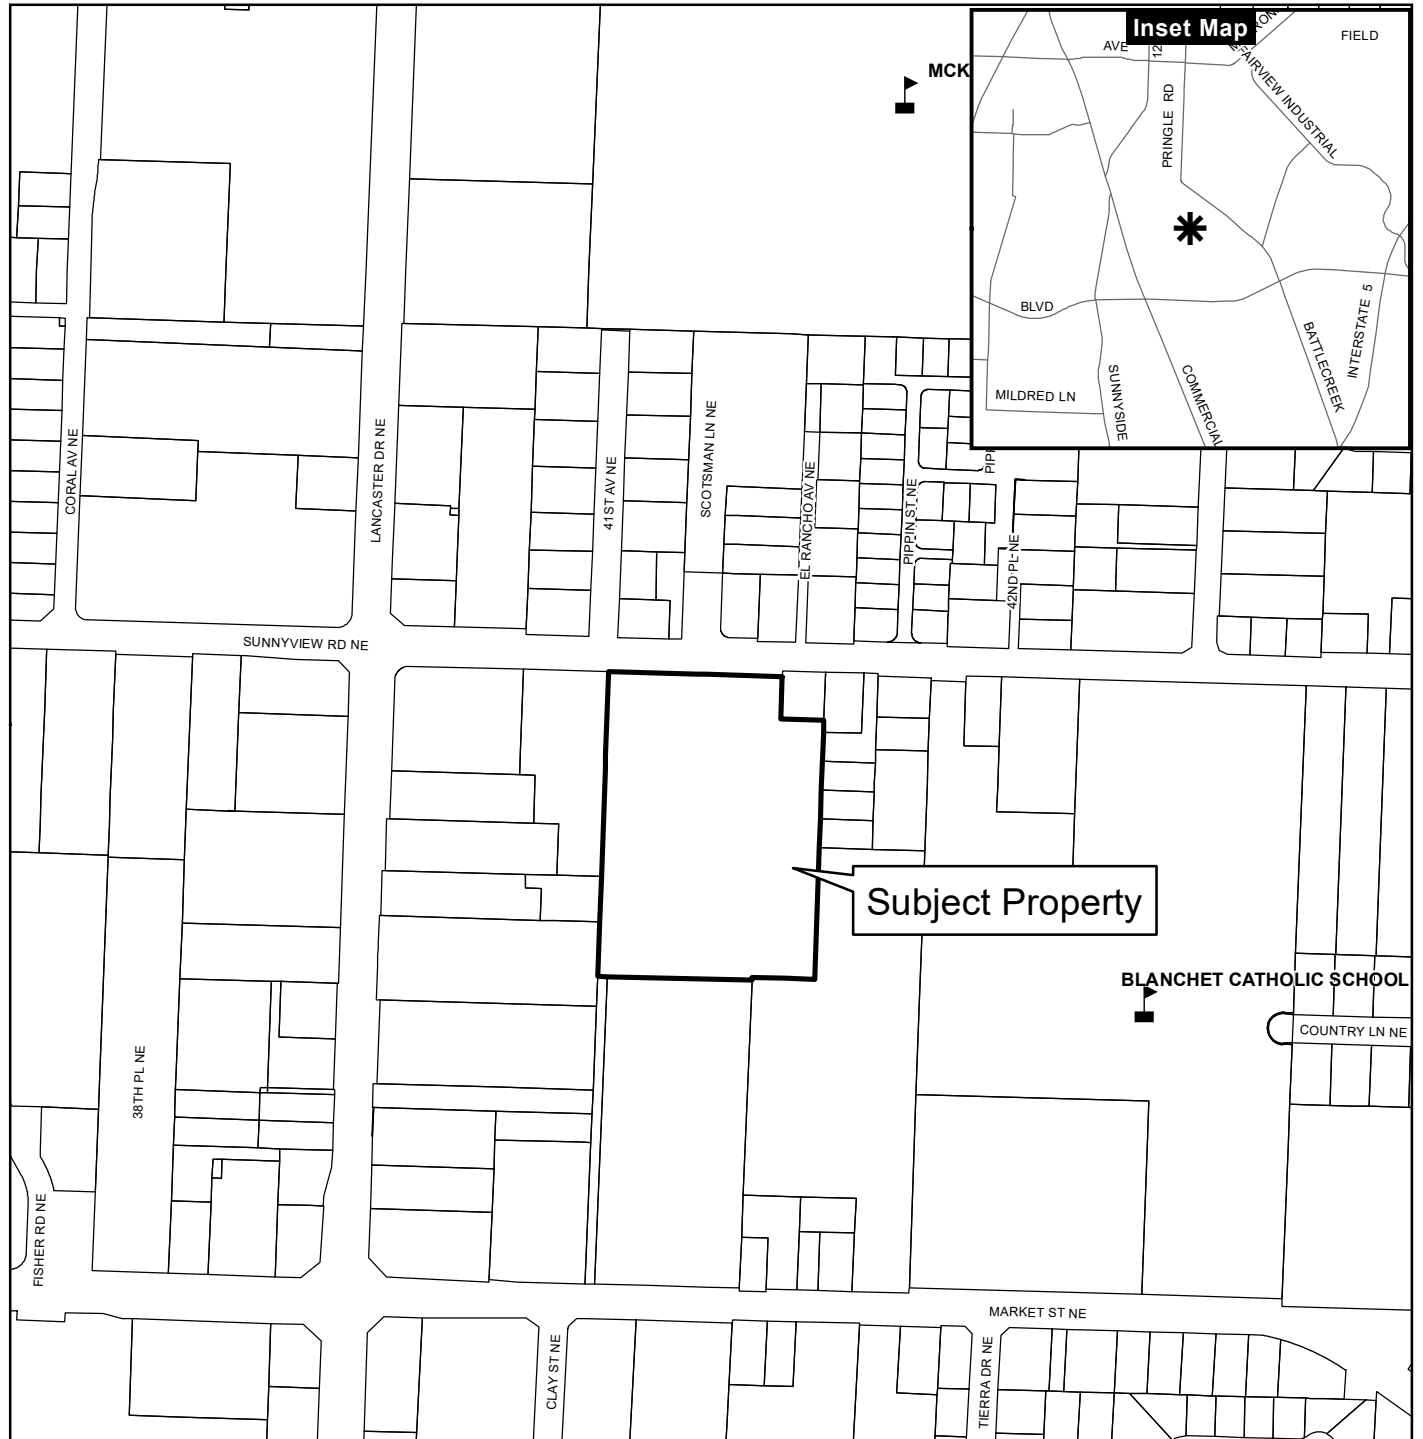

### Legend

- Taxlots
- Urban Growth Boundary
- City Limits
- Outside Salem City Limits
- Historic District
- Schools

- Parks

**CITY OF Salem**  
AT YOUR SERVICE  
Community Development Dept.

This product is provided as is, without warranty. In no event is the City of Salem liable for damages from the use of this product. This product is subject to license and copyright limitations and further distribution or resale is prohibited.

0 100 200 400 Feet









1

Siding

SW 7622  
Homburg Gray

1

2

Trim

SW 7636  
Origami White

2

Actual color may vary from on-screen representation. To confirm your color choices prior to purchase, please view a physical color chip, color card, or painted sample. Sherwin-Williams is not responsible for the content and photos shared by users of their color selection tools. The Cover The Earth logo and the Sherwin-Williams logo are trademarks owned or licensed by The Sherwin-Williams Company. ©2024 The Sherwin-Williams Company.





May 14, 2024

City of Salem-Permit Application Center

Planning Information Counter

555 Liberty ST SE Room 320

Salem, OR 97301-3503

RE: Class 1 Design Review, Brook Hollow Apartments

4154 Sunnyview RD. NE Salem, OR 97305

Dear Planning Department,

I, Sonja Ramos with Pro Exterior Remodelers LLC submitting the following information for class 1 Design Review.

- 1) Land Use Application and fee submitted.
- 2) Recorded deed attached.
- 3) Site Plan attached. Tax assessor's map along with a sheet of all the apartments listed.
- 4) Building Elevations: I have attached 6 pictures: Picture 1- Existing deck look. We are only replacing any necessary rotted railing and pickets with like to like material, there is not change to structure. Picture 2-Some areas have existing ponywalls, this will be removed and continue with railing and pickets, this will be like to like material. Picture 3- Front Elevation. Picture 4-Back Elevation. Picture 5-Left and Right Elevation. Picture 6-Color Schemes. All buildings will have the same look/color schemes with bellyband trim separating 1<sup>st</sup> and 2<sup>nd</sup> floor with lap siding on 1<sup>st</sup> and 2<sup>nd</sup> floor.
- 5) Landscape plan: We are not impacting or altering the existing landscape.
- 6) Topographic Survey and Grading plan: We are not impacting or altering the existing grading.
- 7) Open space plan: We are not changing any footprints to the buildings.

#### SCOPE OF WORK:

##### UNIT 4158 & 4154:

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 16 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.

- 5) ON TWO DECKS: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON TWO UPPER DECKS: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4150

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 10 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON ONE DECK: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4148

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 10 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON TWO DECKS: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4100

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 12 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON TWO DECKS: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4104

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 10 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4110

- 1) Replace existing siding with Hardie siding following manufacturer specifications.

- 2) Replace existing soffit.
- 3) Replace 14 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON ONE DECK: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4118

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 14 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON THREE DECKS: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4120

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 14 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets

#### UNIT 4124

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 12 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4130

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 16 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4134

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 14 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.

- 5) ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4138

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 14 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON ONE DECK: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4144

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 14 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4140

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 16 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON ONE DECK: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4128

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 16 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.
- 5) ON ONE DECK: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON TWO UPPER DECKS: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### UNIT 4114

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 12 existing fascia's.
- 4) Exterior paint on body, trim, doors, deck railings and pickets.



- 5) ON ONE DECK: Replace 2x6 Cedar railing with 2x2 cedar pickets as necessary. ON ONE UPPER DECK: Remove existing pony wall. Replace it with 2x6 cedar railing and 2x2 cedar pickets.

#### FITNESS CENTER

- 1) Replace existing siding with Hardie siding following manufacturer specifications.
- 2) Replace existing soffit.
- 3) Replace 8 existing fascia's.
- 4) Exterior paint on body, trim, and doors.

Please let me know if there is any additional information that we need to provide.

Sonja Ramos, Managing Director  
503 586-4424  
proexteriorremodlers@gmail.com  
Pro Exterior Remodelers LLC  
20936 Hubbard Cutoff RD NE  
Aurora, OR 97002  
CCB#220249