




NOTE: 2" MIN. AIR SPACE REQUIRED BETWEEN WALK-IN BOX AND EXISTING BUILDING WALLS

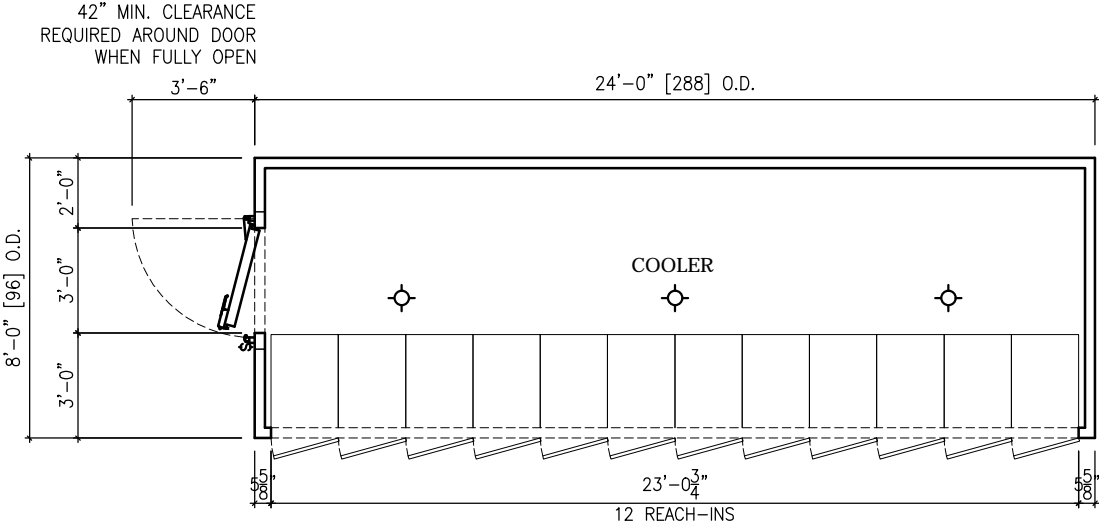

PLAN VIEW

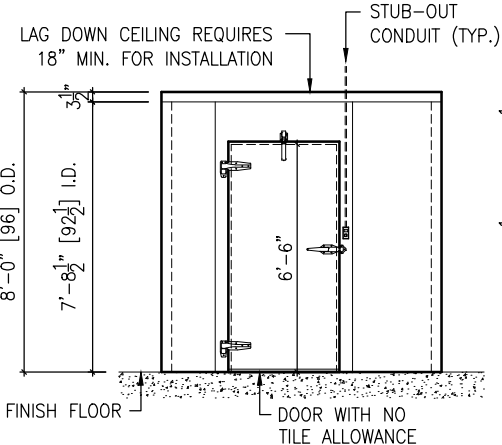

LEFT SIDE ELEVATION

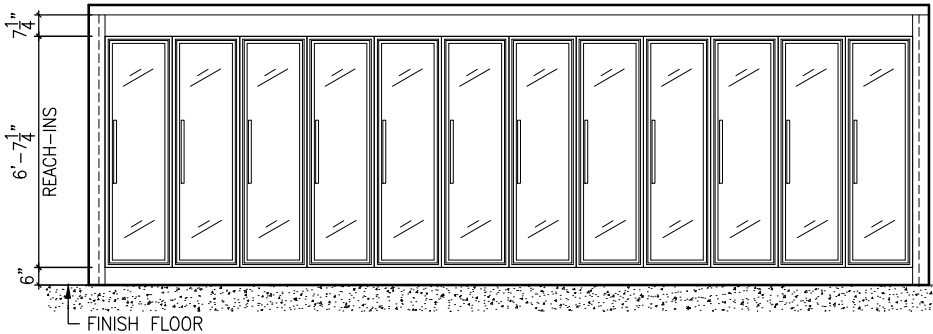

FRONT ELEVATION

WALK-IN COOLER SPEC'S:

LOS ANGELES R.R. & FAB LICENSE

- \* CITY OF LOS ANGELES RESEARCH REPORT: #25314
- \* CITY OF LOS ANGELES FABRICATION APPROVAL: #FB02055
- \* 2009 FEDERAL ENERGY INDEPENDENCE & SECURITY ACT COMPLIANT

CONSTRUCTION:  
NSF, LOS ANGELES R R, TONGUE & GROOVE  
HIGH DENSITY FOAM RAIL, LAG DOWN CEILING  
3-1/2" WALL PANELS; 3-1/2" CEILING PANELS

FLOOR:  
NONE

PANEL FINISH:  
INTERIOR CEILING: 26GA. STUCCO EMBOSSED GALV.  
EXTERIOR CEILING: 26GA. STUCCO EMBOSSED GALV.  
INTERIOR WALLS: 26GA. STUCCO EMBOSSED GALV.  
EXTERIOR WALLS: 26GA. STUCCO EMBOSSED GALV.

DOORS:  
(1) 36"x78" NET OPENING, STD. CAM-LIFT COOLER DOOR  
OVERLAP MOUNTED (38"x79-1/2" DOOR PANEL)  
INTERIOR DOOR & FRAME FINISH: 26GA. S.E.G.  
EXTERIOR DOOR & FRAME FINISH: 26GA. S.E.G.

DOOR ACCESSORIES (PER EACH DOOR):  
(1) KASON LATCH WITH INSIDE SAFETY RELEASE #K58  
(1) KASON CAM-RISE SPRING HINGE #1248  
(1) KASON CAM-RISE HINGE #1245  
(1) HYDRAULIC DOOR CLOSER  
(1) KASON LIGHT SWITCH W/ DIGITAL THERMOMETER  
(RATED 20A, 120V AC) #1967-A2

GLASS REACH-INS:  
(1) SET OF (12) 23"x79" CDS LEGACY COOLER DOORS  
WITH 2-PANE GLASS, T8 LED LIGHTS,  
7-TIER 27" BLACK SHELVES, BLACK TAG MOLDING  
DOOR FRAMES: BLACK FINISH

ADDITIONAL ACCESSORIES (INCLUDED):  
(3) VAPOR PROOF COMPACT LED LIGHT FIXTURE  
(SURFACE MTD; BULBS INCLUDED; SHIPPED LOOSE)  
CAM-LOCK PLUGS  
LAG BOLTS AND WASHERS FOR CEILING (SPACE @23 O.C.)  
6" NSF COVE BASE (INTERIOR & EXTERIOR)  
MATCHING TRIM, SILICONE/CAULKING & SCREWS  
\*ALL ELECTRICAL CONDUIT MUST BE SEALED BY ELECTRICIAN

REFRIGERATION: 35°F COOLER  
(1) RFO400E4SEA - 4HP MED. TEMP. OUTDOOR SCROLL  
COMPRESSOR / R-448A (208-230/30/60Hz)  
(2) RL6A161ADA - LOW-PROFILE COIL / R-448A / EC MOTORS /  
COMPONENTS INCLUDED (115/10/60Hz)

Federal Law Minimum R Value Requirement as of Jan 2009

	Min. R Value for Commercial Cooling Sections	Mean Temp (°F)	Federal Law Min. R=
	3.5"	4"	5"
Cooler	26.6	30.4	38
Freezer	26.6	34.0	42.5
Floor	29.7	34.0	42.5

Sec. 340 of the Energy Policy and Conservation Act (42 U.S.C.6311)  
ASTM method C-518




- ☐ APPROVED AS DRAWN  
☐ APPROVED WITH CHANGES AS NOTED

BY: \_\_\_\_\_


DATE: \_\_\_\_\_

IMPORTANT NOTE:  
PLEASE BE AWARE THAT ESTIMATED TIME OF COMPLETION BEGINS  
WHEN THE FINAL DRAWING IS APPROVED AND SIGNED. ANY CHANGES  
TO THE PREVIOUSLY APPROVED DRAWING WILL DELAY YOUR  
ORDER AND THE RESCHEDULING OF YOUR ORDER MAY BE SUBJECT  
TO ADDITIONAL FEES.



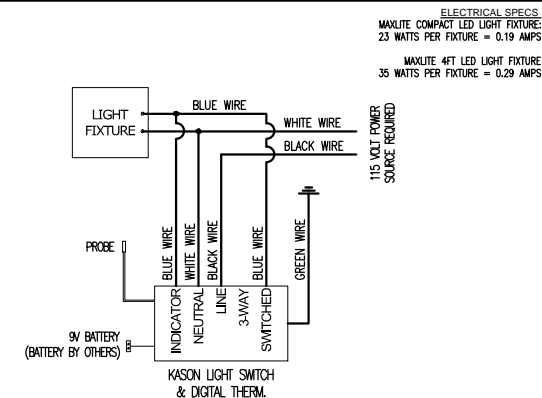

△			
△			
△			
JOB NUMBER:	PANEL QTY.	DATE: 06-18-2024	SHEET:
24-1843-0360	-	DRAWN: KATE HDZ.	1 OF 2
SCALE: 3/8" = 1'-0"			
CUSTOMER INFO:			
COMMERCIAL COOLING PAR ENGINEERING, INC.			
17855 E. ARENTH AVE. CITY OF INDUSTRY, CA. 91748 TEL: (626) 964-8700 FAX: (626) 964-8777			
CERTIFIED SMALL BUSINESS NSF IECC Certified Compliant			

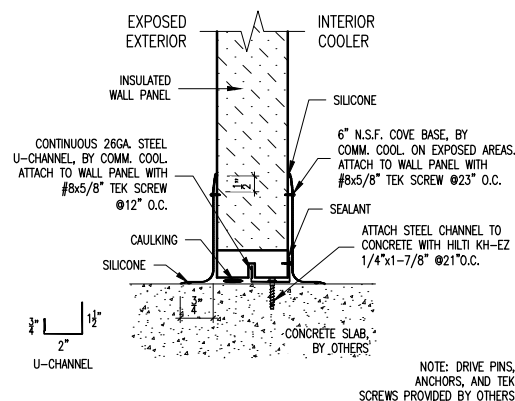

# 3 KASON 1967-A2 LIGHT SWITCH & DIGITAL THERMOMETER (STUB-OUT CONDUIT DETAIL & SCHEMATIC WIRING DIAGRAM)



5 WALL PANEL TO CONCRETE FLOOR  
(STANDARD)

	.		
	.		
	.		
JOB NUMBER: 24-1843-0360	PANEL QTY. —	DATE: 06-18-2024 DRAWN: KATE HDEZ. SCALE: N.T.S.	SHEET: 2 OF 2
CUSTOMER INFO:			
 <b>COMMERCIAL COOLING</b> <b>PAR ENGINEERING, INC.</b>			
17855 E. ARENTH AVE. CITY OF INDUSTRY, CA 91748 TEL: (626) 964-8700 FAX: (626) 964-8777			
