


JOB # 7111

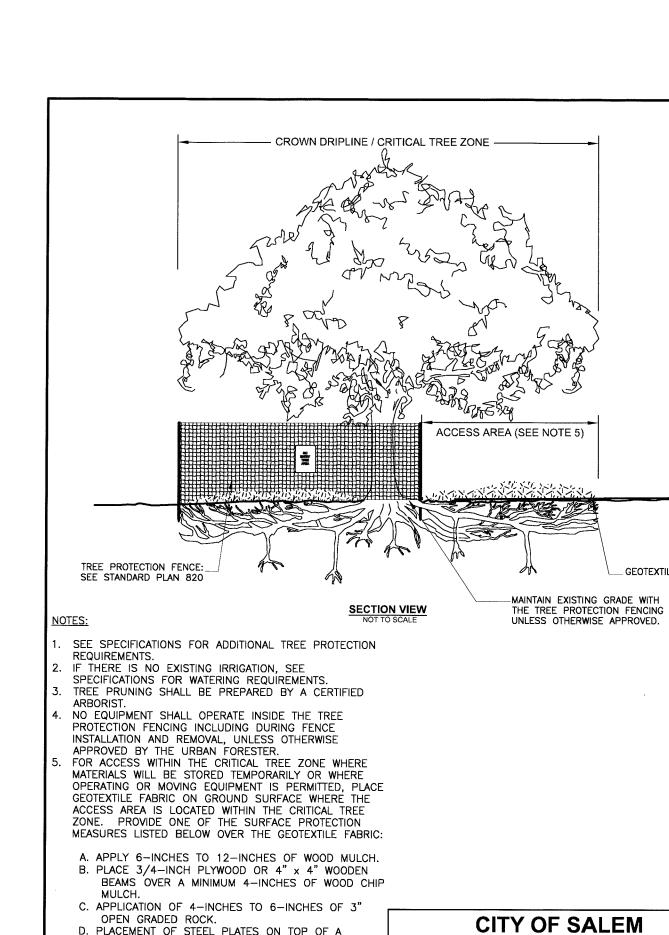

D. PLACEMENT OF STEEL PLATES ON TOP OF A

WOOD CHIP MULCH.

MINIMUM 4-INCH LAYER OF WOOD MULCH.

E. PLACEMENT OF COMMERCIAL OR LOGGING ROAD

MATS ON TOP OF A MINIMUM 4-INCH LAYER OF

mus Spine 6/03/16 DRAWN BY ALT 12/2015

DATE | CHECKED BY | KLR | 12/2015

\_\_GEOTEXTILE\_FABRIC

**DEPARTMENT OF PUBLIC WORKS** 

STANDARD PLAN

MITIGATION MEASURES FOR WORK

**IN CRITICAL TREE AREA** 

DRIP LINE
CRITICAL TREE
ROOT ZONE

CITY OF SALEM

**DEPARTMENT OF PUBLIC WORKS** 

STANDARD PLAN

TREE PROTECTION FENCING

CHECKED BY | KLR | 6/2016

AREA FENCING

TREE PROTECTION

PROTECTION SIGN (TYP)

CRITICAL TREE ROOT ZONE

EXAMPLE NOT TO SCALE

AS DIRECTED BY CITY'S URBAN FORESTER.

ORANGE COLOR, AND 1.25" X 6' "T" POSTS, OR APPROVED EQUAL.

FENCE REQUIRES APPROVAL BY CITY'S AUTHORIZED REPRESENTATIVE.

REMOVAL UNLESS APPROVED BY THE URBAN FORESTER.
PLACE TREE PROTECTION SIGNS (STANDARD PLAN 822)
SECURELY ON TREE PROTECTION FENCING WITH WIRE TIES

42 INCHES ABOVE GROUND ON 50 FT. SPACING, O.C.

AND MUST BE CLEARLY VISIBLE TO CONTRACTORS AND

OR PLASTIC "ZIP" TIES. SIGN SHALL BE PLACED

PROTECTION AREA FENCING

<u>OTES:</u>
FENCE SHALL BE 4 TO 6 FT. IN HEIGHT AND SET AT TREE DRIP LINE, OR EDGE OF HARDSCAPE AS INDICATED ABOVE, OR

FENCE MATERIALS SHALL CONSIST OF A 4 FT. HIGH, HIGH DENSITY POLYETHYLENE FENCING WITH 3.5" X 1.5" OPENINGS

POSTS SHALL BE SPACED 8 FEET APART AND SHALL BE DRIVEN TO SUCH A DEPTH TO SECURELY ANCHOR THE POSTS, FENCE SHALL REMAIN IN PLACE UNTIL THE COMPLETION OF ADJACENT CONSTRUCTION ACTIVITIES. MOVEMENT OR REMOVAL OF

NO EQUIPMENT SHALL OPERATE INSIDE THE TREE PROTECTIVE FENCING INCLUDING DURING FENCE INSTALLATION AND

omus 5 pine 6/03/16 DRAWN BY ALT 6/2016



(OR EQUAL)

STRAW BALES

CITY OF SALEM

DEPARTMENT OF PUBLIC WORKS

STANDARD PLAN

CONCRETE MANAGEMENT FACILITY

- 2"X2" STAKES

OR #4 J-BARS 2 PER BALE TYP

BALE CONFIGURATION

SECTION A-A

GRAPHICAL REPRESENTATION

SHALL BE CONTINUOUS.

ONLY. STRAW BALE PERIMETER

CHECKED BY

SAND BAGS

PROVIDE "CONCRETE WASHOUT AREA" SIGN AS

INSTALL CONCRETE WASHOUT SIGN ADJACENT TO

CONCRETE MANAGEMENT FACILITIES. FACE SIGN TOWARD NEAREST STREET OR ACCESS POINT.

CONCRETE WASHOUT SHALL BE LOCATED BEHIND

CURB AND 50 FT. MINIMUM FROM DRAINAGE INLETS

SHOWN OR AS APPROVED.

OR WATERCOURSES.

3" LETTERS -

