GROUNDCOVER PLANTING DETAIL

REMOVE BURLAP OR POT

2" DEEP RAINWATER COLLECTION
BASIN MULCH TO GRADE
BARK MULCH WHERE SPECIFIED

PREPARED PLANTING SOIL
EXISTING SOIL
COMPACTED PLANTING SOIL

TWO TIMES ROOTBALL SIZE SHRUB PLANTING DETAIL

SCALE: NTS

TREE TIES STRAP TYPE "GRO-STRAIGHT". —2'-2" X 2" X 8' P.T.D.F. STAKE, CONSTRUCTION GRADE. —PLANT TREE DEPTH AT ROOT FLAIR. ROOT FLAIR MUST BE VISIBLE. TREES WITHOUT VISIBLE TRUNK FLARE WILL BE REJECTED -REMOVE BURLAP AND WIRE BASKET. -2" DEEP RAINWATER COLLECTION BASIN. THOROUGHLY WATER IN.MULCH TO GRADE. KEEP MULCH AWAY FROM TRUNK —BARK MULCH WHERE SPECIFIED. --PLANT TABS, SEE SPECS. -EXISTING SOIL. -PREPARED PLANTING SOIL. -DRIVE STAKES A MINIMUM OF 12" OF RESISTANCE. -SET ROOTBALL ON NATIVE SOIL OR 90% DRY DENSITY COMPACTED BACKFILL MIX. TWO TIMES ROOTBALL SIZE


3 DECIDUOUS TREE PLANTING DETAIL SCALE: NTS

AIL (1

SCALE: NTS

NOTES:

- A. SEE TREE PROTECTION NOTE ON L0.1 FOR MORE DETAIL.
- B. SEE TREE PROTECTION PLAN FOR LOCATIONS OF TREE PROTECTION FENCE

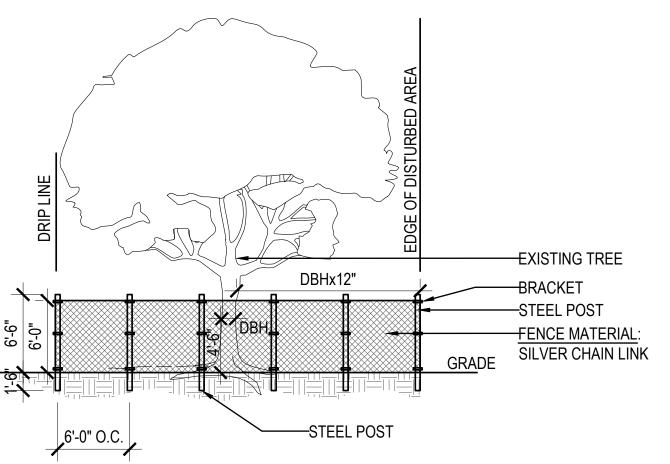

TREE PROTECTION FENCE

TREE PRESERVATION NOTES

- ROOT PROTECTION ZONE IS DEFINED AS ONE-FOOT (1') IN RADIUS FOR EACH ONE-INCH (1") OF TREE CALIPER, AS MEASURED AT A HEIGHT OF 4 1/2' ABOVE GRADE.
- 2. PRESERVED AND RETAINED TREES ARE TO BE PROTECTED FROM CONSTRUCTION ACTIVITIES BY STURDY FENCING. THE FENCING MATERIAL SHALL BE HIGHLY VISIBLE, 6-FEET HIGH, CHAIN-LINK, ATTACHED SECURELY TO 8' HIGH, METAL FENCE POSTS DRIVEN INTO THE GROUND AT 6-FOOT INTERVALS.
- 3. WHERE EXISTING INFRASTRUCTURE PREVENTS POSTS FROM BEING DRIVEN INTO THE GROUND, METAL T-POSTS OR CONCRETE BLOCKS MAY BE USED TO SECURE THE PROTECTION FENCING.
- 4. TREE PROTECTION FENCING SHALL BE INSTALLED BEFORE ANY CONSTRUCTION STARTS AND REMAIN IN PLACE UNTIL CONSTRUCTION IS COMPLETE.
- 5. TREE PROTECTION DEVICES SHALL BE INSTALLED TO PROTECT THE ROOT ZONES OF TREES LOCATED ON ADJOINING PROPERTIES IF ANY TYPE OF ACTIVITY WILL BE DISTURBING THE ROOT PROTECTION ZONE.
- 6. THE FOLLOWING DEVELOPMENT IS NOT ALLOWED WITHIN ROOT PROTECTION ZONES:
- A. NEW BUILDINGS
- B. GRADE CHANGE OR CUT AND FILL DURING OR AFTER CONSTRUCTION.
- C. NEW IMPERVIOUS SURFACES
- D. UTILITY OR DRAINAGE FIELD PLACEMENT
- E. STAGING OR STORAGE OF MATERIALS AND EQUIPMENT DURING CONSTRUCTION.
- F. VEHICLE MANEUVERING AREAS DURING CONSTRUCTION.
- 6. TREE PROTECTION TO COMPLY WITH CITY OF SALEM CODE TITLES 807.030 AT TIME OF BUILDING PERMIT.

LANDSCAPE NOTES

- 1. LANDSCAPE CONTRACTOR SHALL SEE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
- 2. ALL LANDSCAPING SHALL BE INSTALLED ACCORDING TO ACCEPTED BEST INDUSTRY STANDARDS FOR PLANTING PROCEDURES.
- 3. PLANT MATERIALS SHALL BE OF HIGH GRADE, AND SHALL MEET THE QUALITY AND SIZE STANDARDS FOR NURSERY STOCK.
- 4. PLANTINGS SHALL BE MULCHED TO A MINIMUM DEPTH OF 2 INCHES AND 18 INCHES IN DIAMETER.
- 5. PLANT QUANTITIES SHOWN IN PLANS TAKE PRECEDENCE OVER QUANTITIES LISTED IN LEGEND.
- PLANTS INDICATED AS SPECIMEN ARE TO BE HAND SELECTED BY LANDSCAPE ARCHITECT.
- PLANTINGS SHALL BE INSTALLED BETWEEN FEBRUARY 1st AND MAY 1st OR BETWEEN OCTOBER 1st AND NOVEMBER 15th. SEE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.





SALEM NAVIGATION CENTER

1185 22ND ST SE, SALEM, OR 97302 SALEM HOUSING AUTHOI

10.29.21

....

21.115

PLANTING NOTES

L3.1

ADDENDUM 1

© MERRYMAN BARNES ARCHITECTS, INC.