

 = SILT SACK
 = BIO BAGS
 = STRAW WATTLES
 = SEDIMENT FENCE
 = SIGNIFICANT TREE

(P) PROTECT AT ALL TIMES


(R) CONTRACTOR TO REMOVE AND DISPOSE OF OFFSITE.

X = CONTRACTOR TO REMOVE
NON-JURISDICTIONAL TREE.
($<10'$ IN DIAMETER)


(X) = TREE TO BE REMOVED
PER TREE PERMIT.

— ORANGE SILT FENCING, CONTRACTOR SHALL
INSTALL AROUND ALL TREES NOT SHOWN TO BE
REMOVED IN ACCORDANCE W/ NOTE 3 (THIS PAGE)
& WETLANDS PRIOR TO STARTING CONSTRUCTION.

1. CONTRACTOR SHALL PROTECT ALL TREES NOT SHOWN FOR REMOVAL.
2. CONTRACTOR SHALL KEEP WETLAND FILL PERMIT ON SITE AT ALL TIMES.
3. TREE SHOWN FOR PROTECTION SHALL HAVE ORANGE PROTECTION FENCING. INSTALL 10' PAST THE DRIP LINE FOR EACH TREE AS DETERMINED BY THE TREE'S CANOPY.

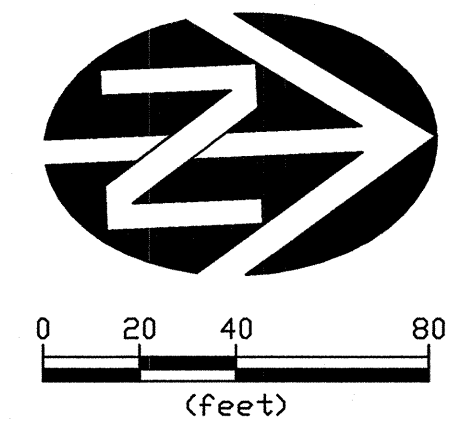


MATCH LINE SEE SHEET C1.1 FOR CONTINUATION

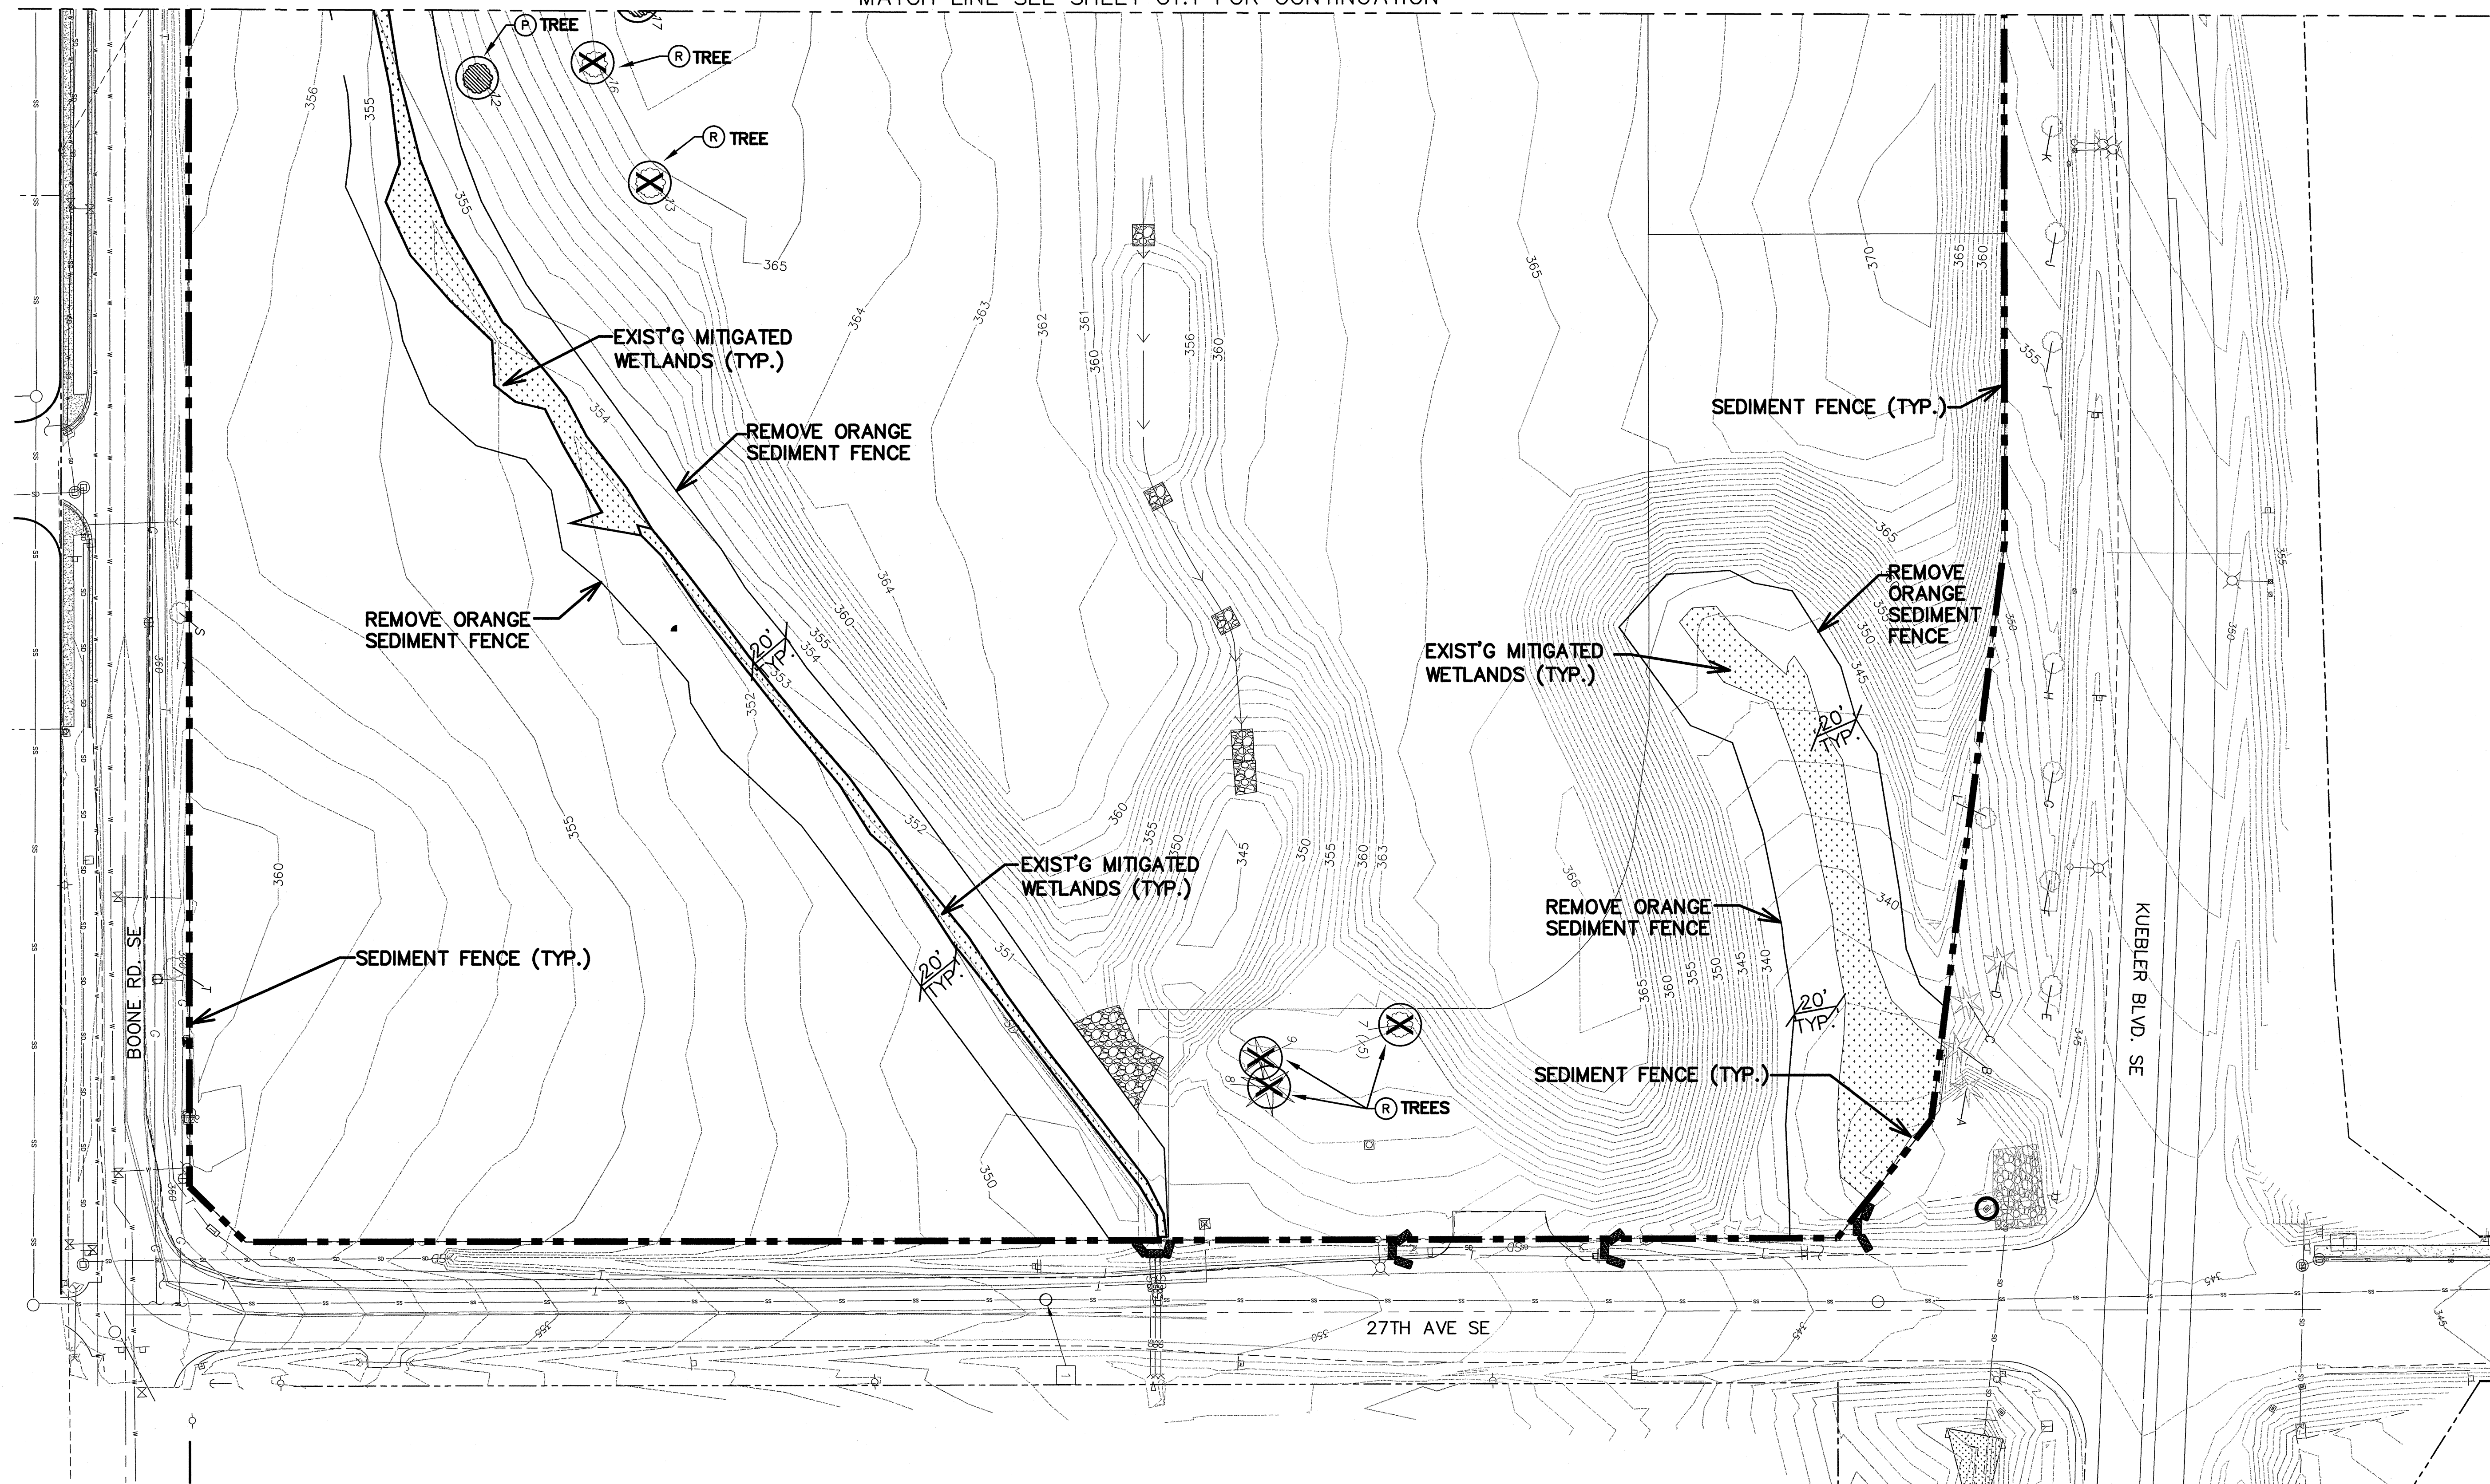

4/15/2013 10:22:46 AM
R:\Dwg\PAC-TRUST\Moss Grading (PHASE 2) 4-2-13\Civil\Plots\SHT-C-1.0 EROS-W-TABS.dwg, (EAST tab)

[illegible]

VERIFY SCALE	1"
BAR IS ONE INCH ON ORIGINAL DRAWING	
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY	
DSN.	JW
DRN.	TSN
CKD.	JW
DATE: APR 2013	

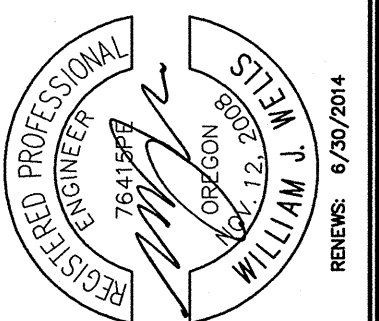

WESTTECH ENGINEERING, INC.
CONSULTING ENGINEERS AND PLANNERS

1841 Farview Industrial Dr. S.E., Suite 100, Salem, OR 97302
Phone: (503) 585-2474 Fax: (503) 585-3986
E-mail: westtech@westtech-eng.com

**EXISTING CONDITIONS,
DEMOLITION & EROSION
CONTROL PLAN (EAST)**

DRAWING
C1.2
JOB NUMBER
2672.7000.1