


ALL DETAILS ARE TO COMPLY WITH THE ACCESSIBLE STANDARDS PUBLISHED BY
OREGON DEPT OF TRANSPORTATION (2018)
<https://www.oregon.gov/ODOT/Engineering/DOCS_ADA/ADA_Standards-Accessible-Parking.pdf>


ACCESSIBLE PARKING SPACES
AND ACCESS AISLES SHALL BE
LOCATED ON A SURFACE WITH
A SLOPE NOT TO EXCEED 1 UNIT
VERTICAL IN 50 UNITS HORIZONTAL
(2%) IN ALL DIRECTIONS.



6' min OREGON)
at typ. accessible
parking stall
8' min. at van accessible
parking stall

SIGN MOUNTING
POST-MOUNTED SIGNS SHALL BE
INSTALLED WITH A VERTICAL
CLEARANCE OF 7' (+.3") BETWEEN THE
BOTTOM OF THE
SIGN TO THE GROUND LINE. IF MORE
THAN ONE SIGN IS REQUIRED FOR THE
ACCESSIBLE PARKING SPACE, ALL
SIGNS SHALL BE MOUNTED ON A
SINGLE POST EXCEPT FOR THE
"ACCESSIBLE NO PARKING" AND
ARROW SIGNS. WHEN SIGNS ARE
MOUNTED ON BUILDINGS OR PIERS, A
VERTICAL CLEARANCE OF 5' MINIMUM
SHALL BE MAINTAINED BETWEEN THE
BOTTOM OF THE SIGN AND THE FLOOR
OF THE PARKING SPACE.

6' min OREGON)
at typ. accessible
parking stall
8' min. at van accessible
parking stall

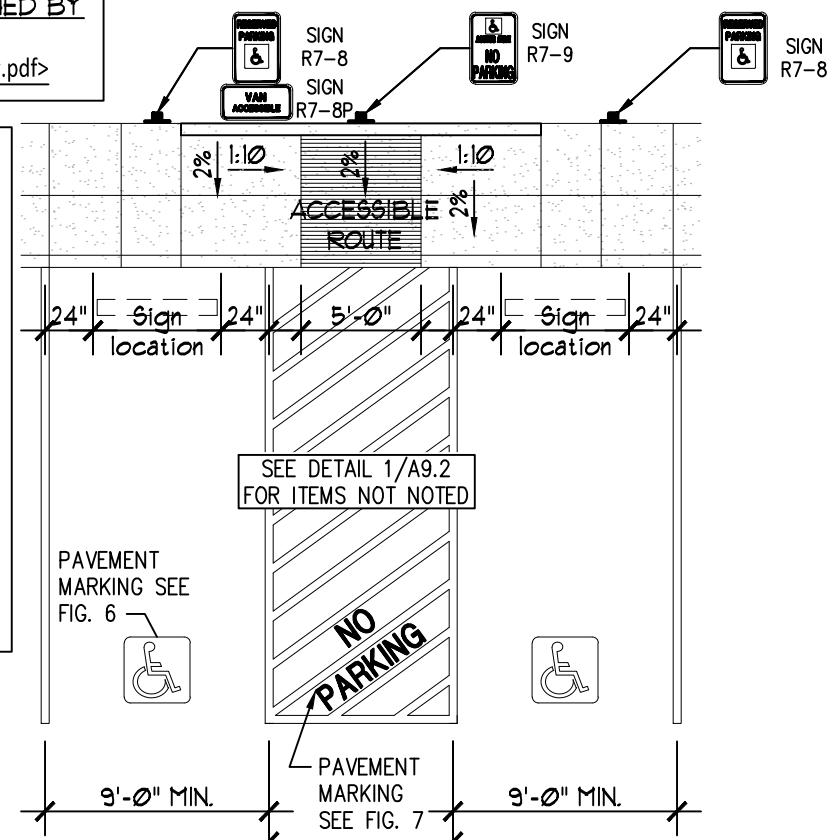

SEE DETAIL 1/A9.2
FOR ITEMS NOT NOTED

SINGLE-ACCESSIBLE PARKING SPACE
VAN-ACCESSIBLE DESIGNATION REQUIRED

SCALE: 1/8" = 1'-0"

M:/02SITEWK/580PYMRK/02580 HC-SGL

DOUBLE-ACCESSIBLE PARKING SPACE
ONE VAN-ACCESSIBLE DESIGNATION REQUIRED

SCALE: 1/8" = 1'-0"

M:/02SITEWK/580PYMRK/02580 HC-SGL