

- THE AREA OF THE CONSTRUCTION ENTRANCE SHALL BE STRIPPED OF ALL TOPSOIL, VEGETATION, ROOTS, AND OTHER NON-COMPACTABLE MATERIAL.
- SUBGRADE SHALL BE COMPACTED AND PROOFROLLED PRIOR TO PLACEMENT OF GRANULAR MATERIAL. FAILURE TO PASS PROOFROLL WILL REQUIRE USE OF WET WEATHER SECTION.
- 5. FAILURE OR PUMPING OF THE DRY WEATHER SECTION WILL REQUIRE REMOVAL OF THE GRANULAR MATERIAL AND INSTALLATION OF THE WET WEATHER SECTION.

## MAINTENANCE NOTES:

PRIOR TO LEAVING THE SITE.


- THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOW OF SEDIMENT ONTO PUBLIC RIGHT-OF-WAY. THIS MAY REQUIRE PERIODIC TOP DRESSING WITH 3"-6" INCH STONE AS
- CONDITIONS DEMAND, AND REPAIR AND/OR CLEAN-OUT OF STRUCTURES USED TO TRAP SEDIMENT. ALL MATERIALS SPILLED, DROPPED, WASHED OR
- TRACKED FROM VEHICLES ONTO ROADWAYS OR INTO STORM DRAINS MUST BE REMOVED IMMEDIATELY . ALL TRUCKS TRANSPORTING SATURATED SOILS SHALL BE WELL SEALED. WATER DRIPPAGE FROM TRUCKS MUST BE REDUCED TO 1 GALLON PER HOUR

CONSTRUCTION ENTRANCE WESTECH ENG.

6100

**TEMPORARY** 

STANDARD

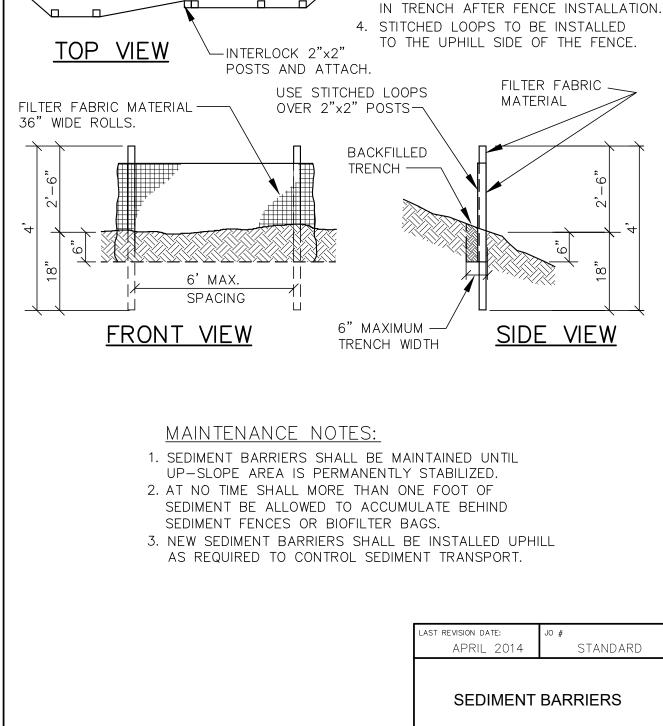

-ANGLE BOTH ENDS OF FILTER FABRIC -

FENCE TO ASSURE SOIL IS TRAPPED.

SILT FENCE NOTES:

1. BURY BOTTOM OF FILTER FABRIC 6"


VERTICALLY BELOW FINISHED GRADE.


2. TRENCH TO BE DUG WITH DITCH-WITCH,


BY HAND OR OTHER METHOD AS

3. BACKFILL & COMPACT NATIVE SOIL

REQUIRED TO MINIMIZE WIDTH.

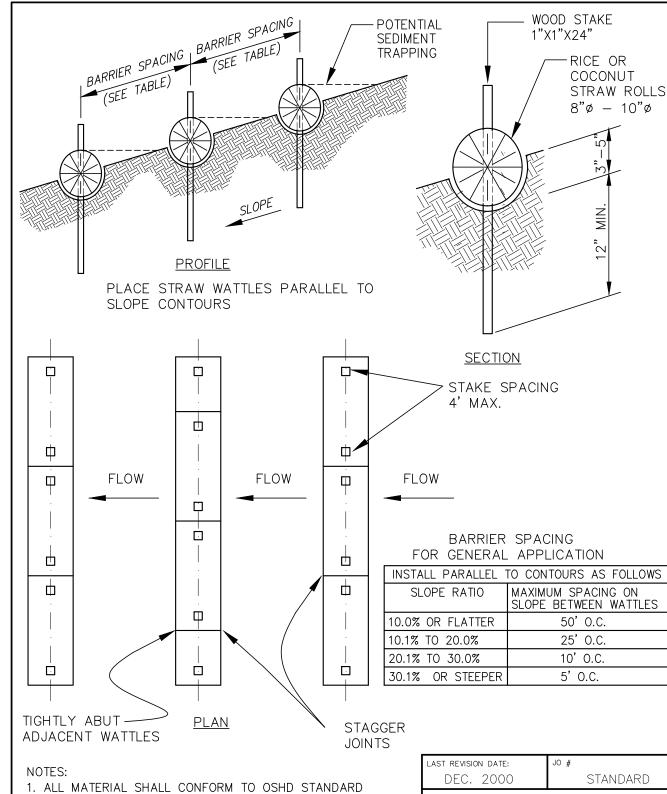

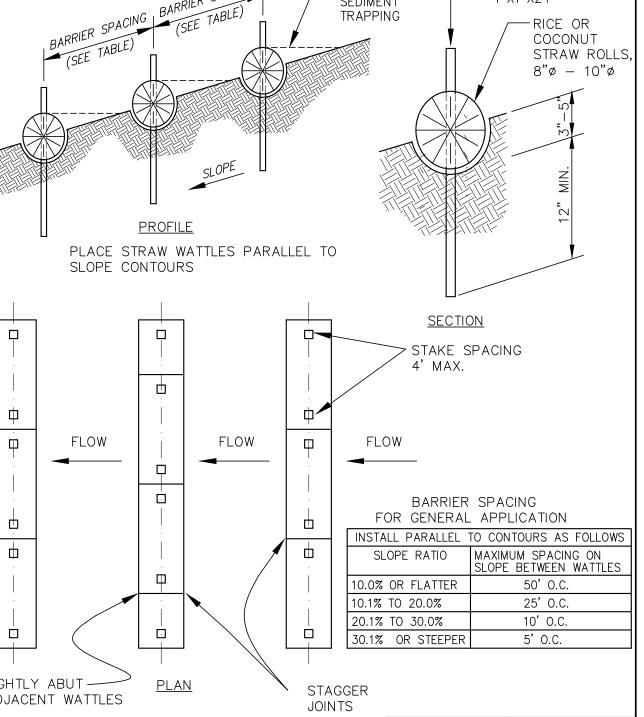

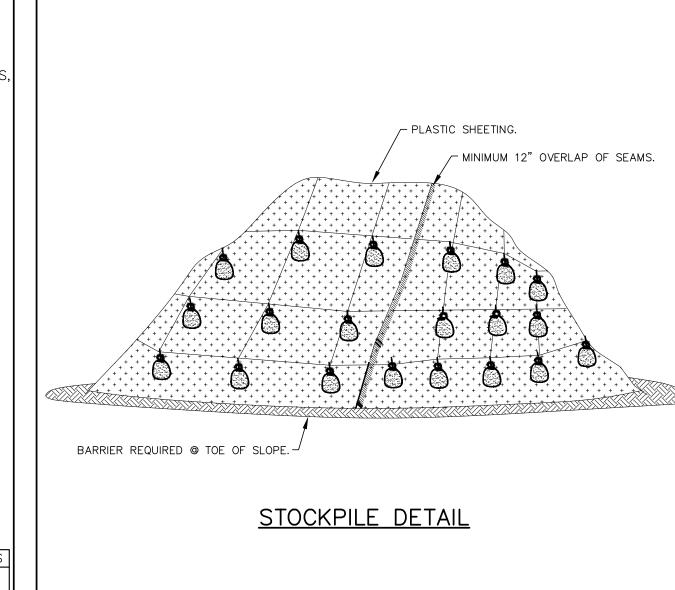

STRAW WATTLE

SEDIMENT BARRIER

WESTECH ENG.

6120

N N

STANDARD


6150

(NITC)


WESTECH ENG.

- MINIMUM 12" OVERLAP OF ALL SEAMS REQUIRED.
- 2. SEDIMENT BARRIER REQUIRED @ TOE OF STOCK
- COVERING MAINTAINED TIGHTLY IN PLACE BY USING SANDBAGS OR TIRES ON ROPES WITH A MAXIMUM 10' GRID SPACING IN ALL DIRECTIONS.
- PLASTIC SHEETING TO EXTEND A MINIMUM OF 12" PAST THE BOTTOM OF THE PILE ONTO SURROUNDING GRADE ON ALL SIDES.


JAN 2019	STANDARD
STOCKPILE DETAIL (NTS)	
(11	DETAIL NO.
WESTECH ENG.	6170

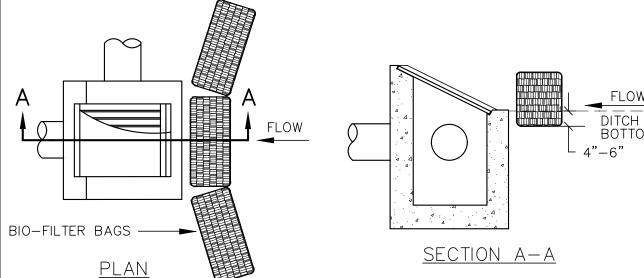

- UP-SLOPE AREA IS PERMANENTLY STABILIZED. . AT NO TIME SHALL MORE THAN ONE FOOT OF SEDIMENT FENCES OR BIOFILTER BAGS.
- NEW SEDIMENT BARRIERS SHALL BE INSTALLED UPHILL AS REQUIRED TO CONTROL SEDIMENT TRANSPORT.



6130 WESTECH ENG.

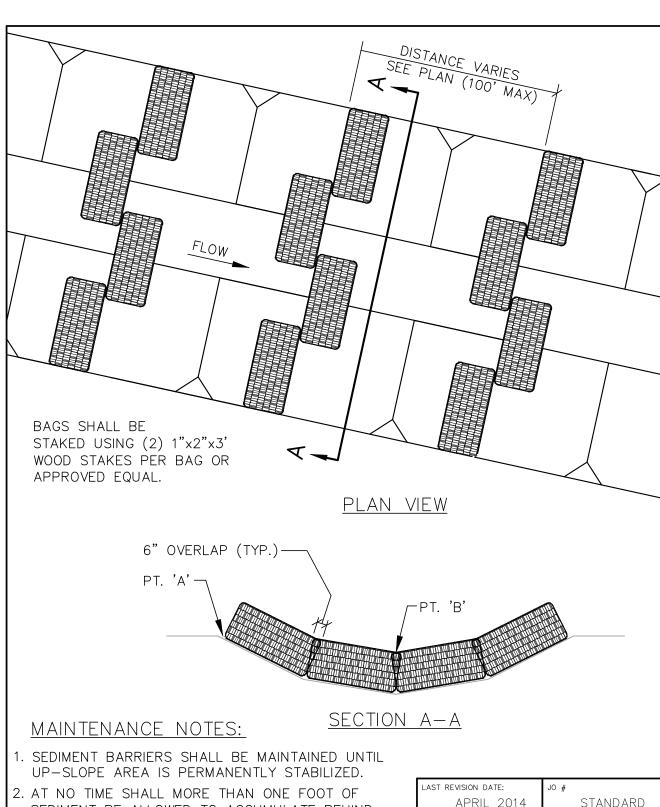

SEDIMENT BE ALLOWED TO ACCUMULATE BEHIND


NEW SEDIMENT BARRIERS SHALL BE INSTALLED

UPHILL AS REQUIRED TO CONTROL SEDIMENT

. PT. 'A' SHALL BE 6" MIN. HIGHER THAN PT. 'B'.

BIOFILTER BAGS.

TRANSPORT.

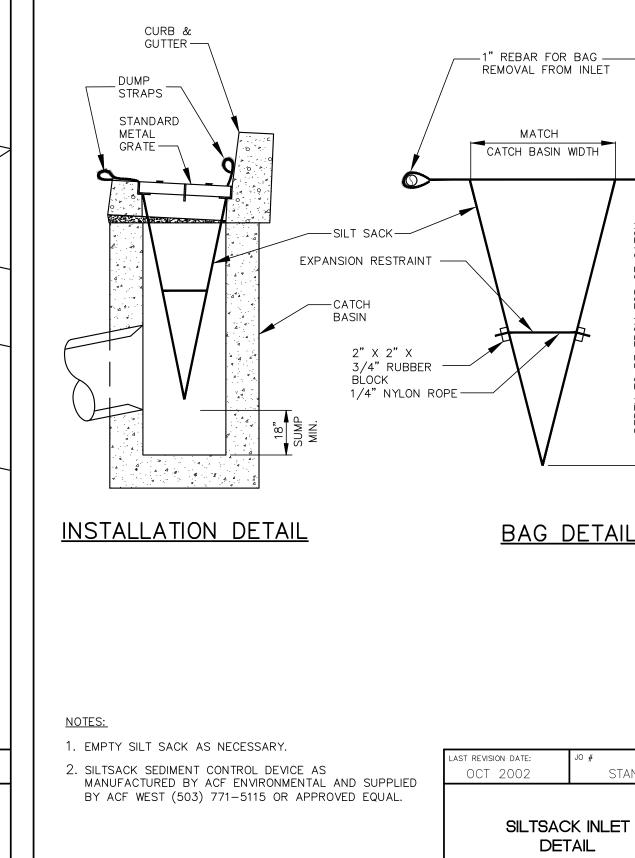

SPECIFICATIONS, 1996 EDITION.

6110

WESTECH ENG.

DITCH AND SWALE

**EROSION PROTECTION** 

WESTECH ENG.

6140

2. SEDIMENT BARRIERS SHALL BE MAINTAINED UNTIL


AS REQUIRED TO CONTROL SEDIMENT TRANSPORT.


ACCUMULATE ABOVE THE TOP OF THE STRAW WATTLE

4. NEW SEDIMENT BARRIERS SHALL BE INSTALLED UPHILL

UP-SLOPE AREA IS PERMANENTLY STABILIZED.

3. AT NO TIME SHALL SEDIMENT BE ALLOWED TO

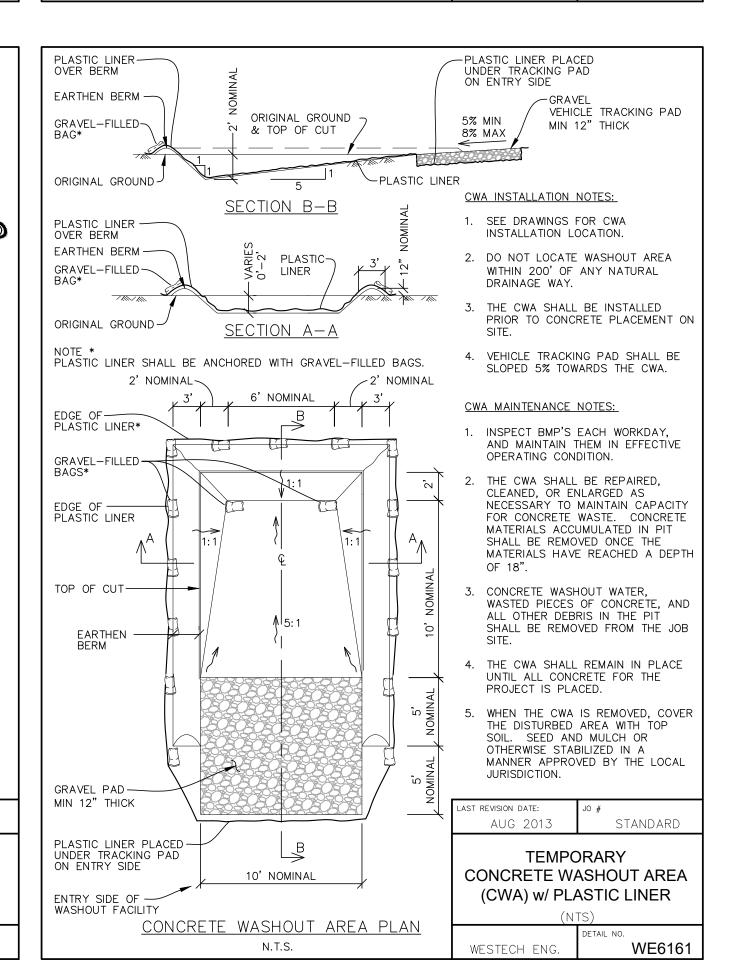

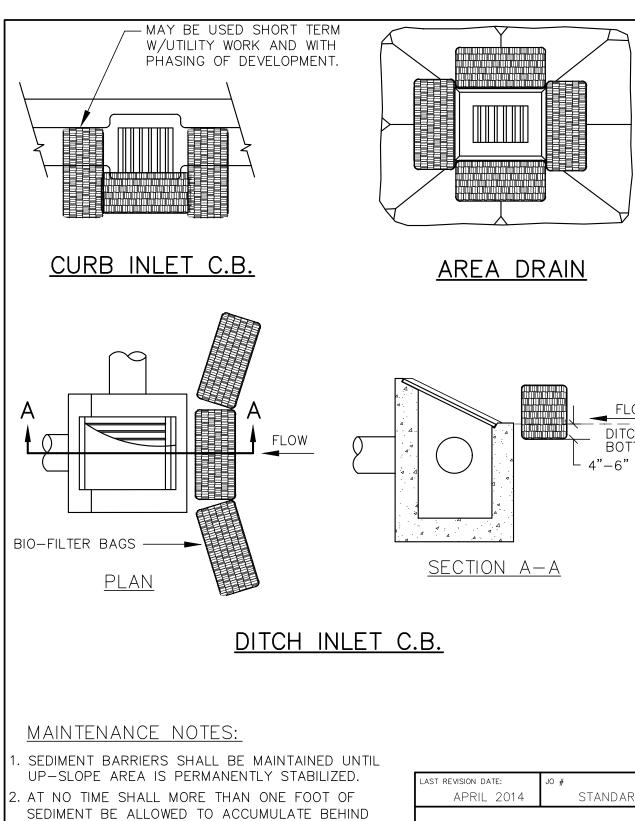

JOB NUMBER 3429.0000

DRAWING

₹

0

O

 $\bigcirc$ 

O

S

RO