


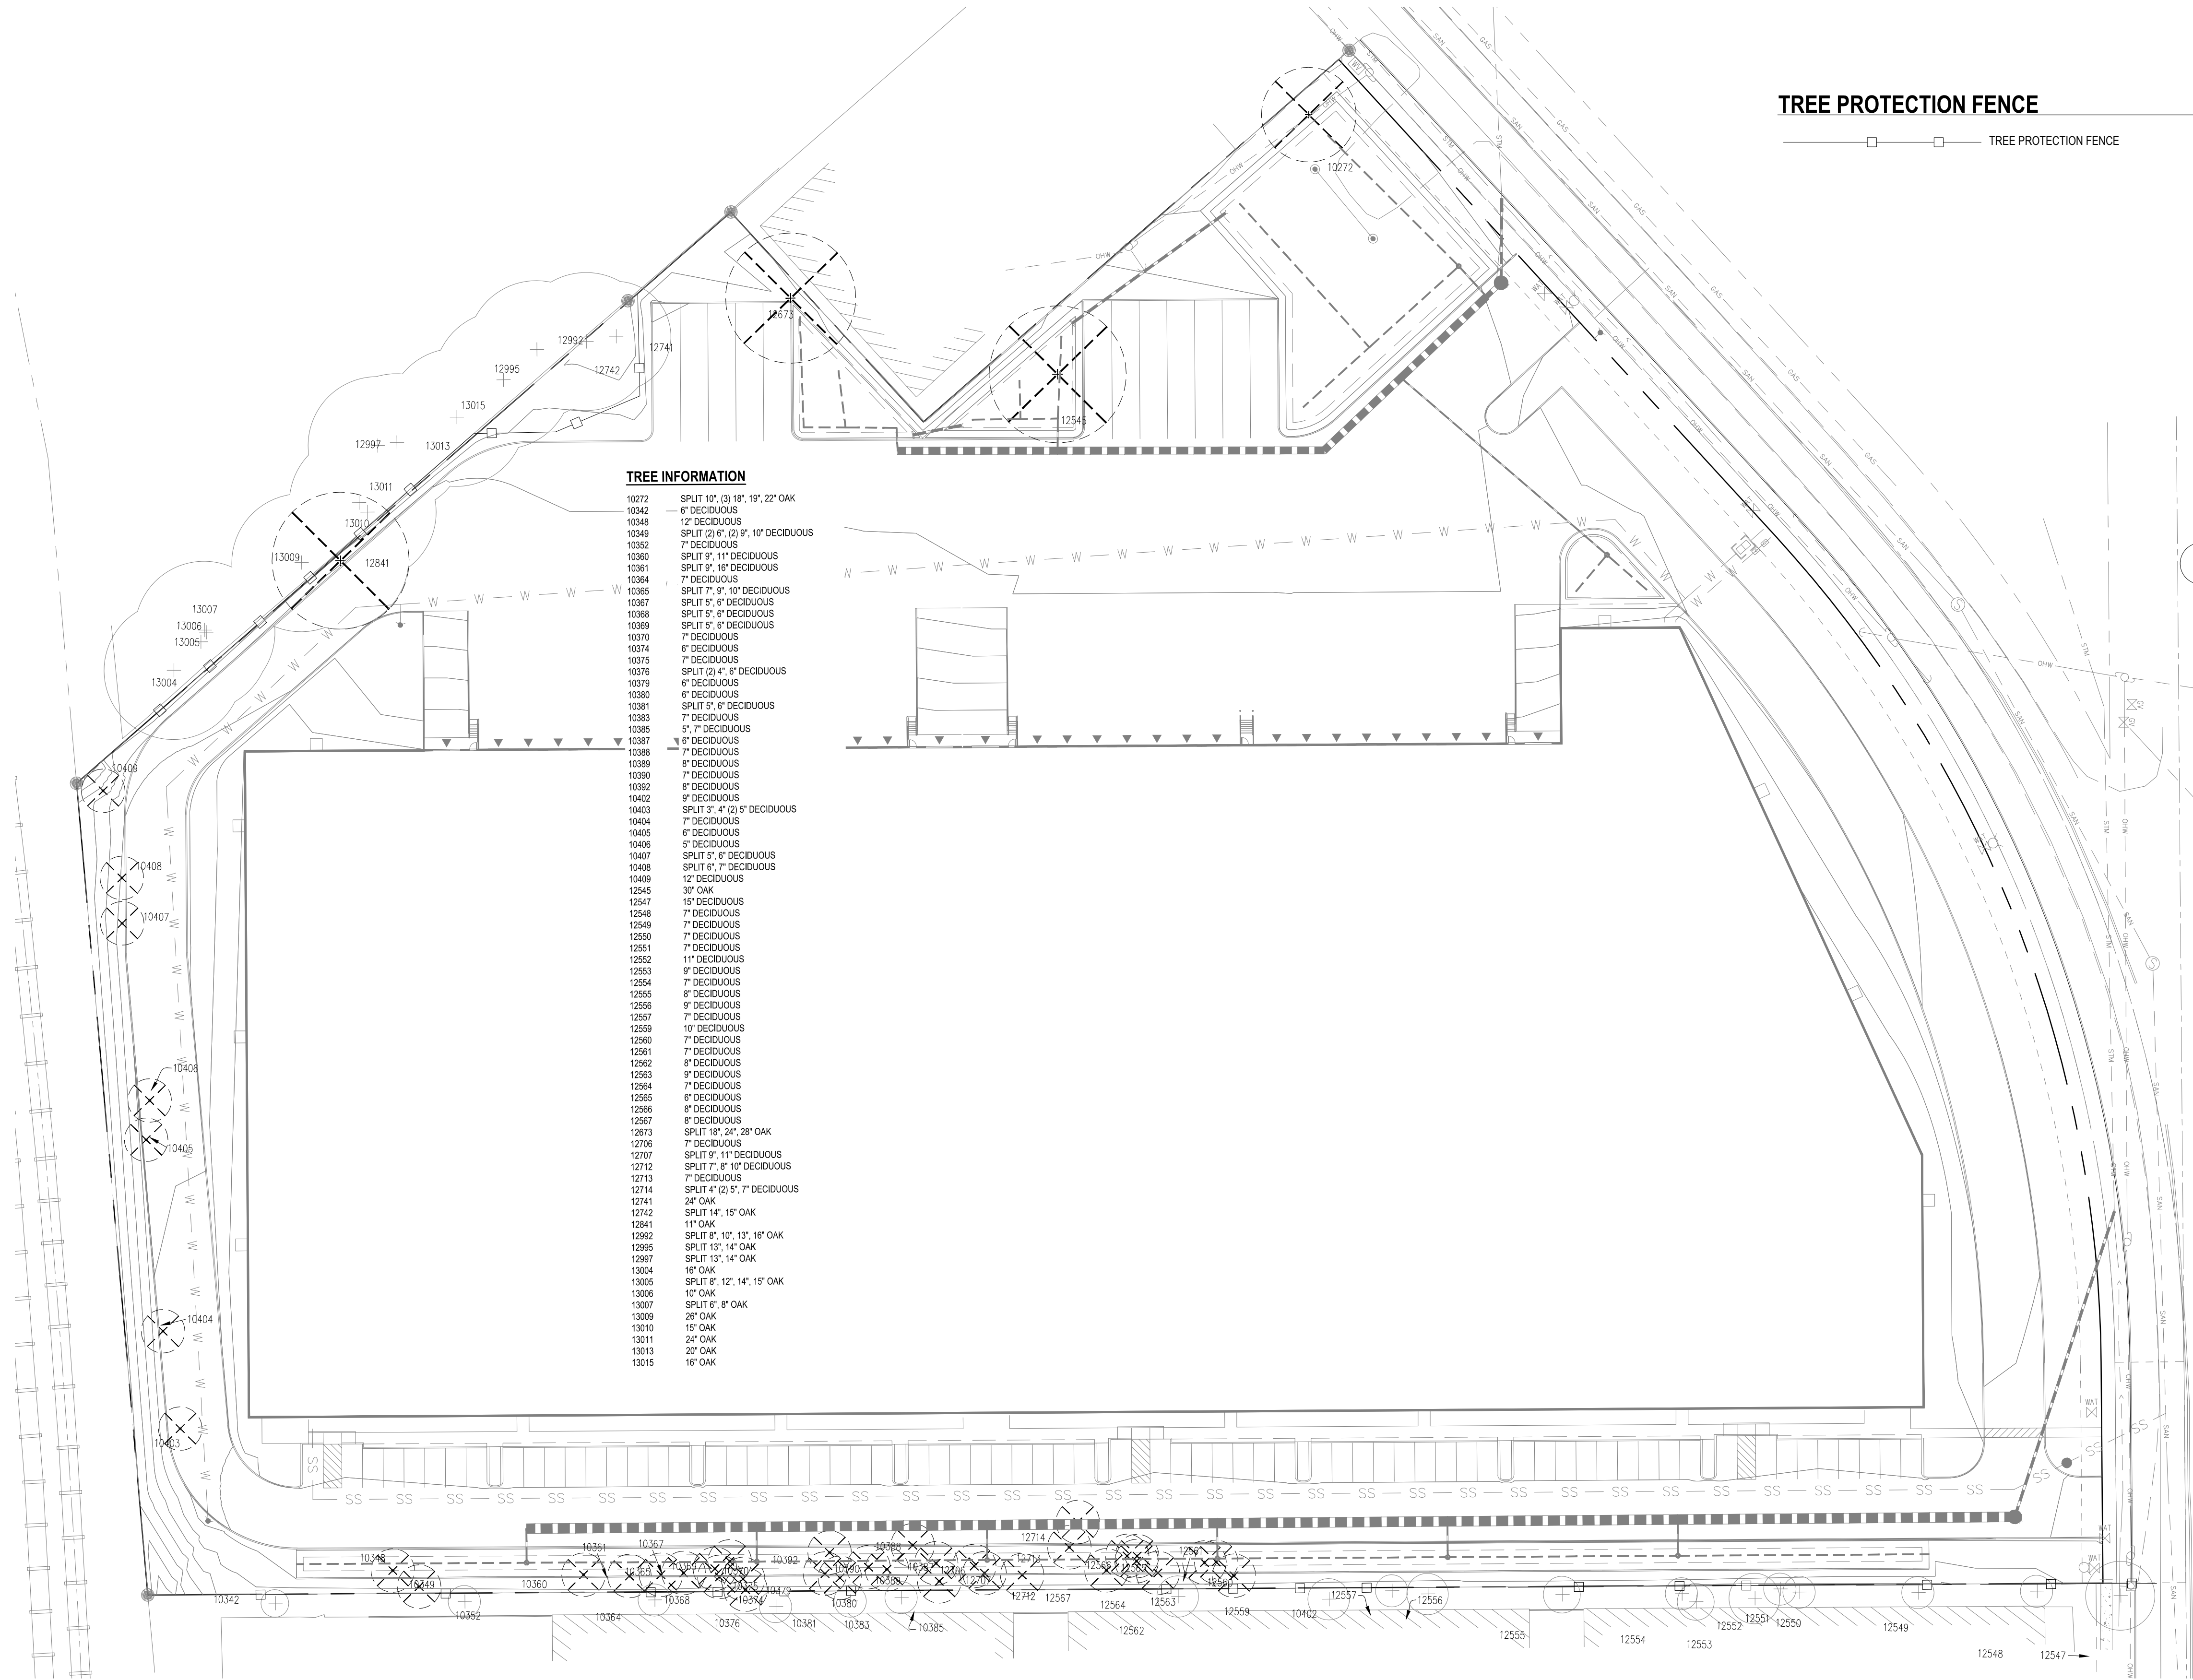


TREE INFORMATION

10272	SPLIT 10", (3) 18", 19", 22" OAK
10342	6" DECIDUOUS
10348	12" DECIDUOUS
10349	SPLIT (2) 8" (2) 9", 10" DECIDUOUS
10352	7" DECIDUOUS
10360	SPLIT 9", 11" DECIDUOUS
10361	SPLIT 9", 10" DECIDUOUS
10364	7" DECIDUOUS
10365	SPLIT 7", 9", 10" DECIDUOUS
10367	SPLIT 5", 6" DECIDUOUS
10368	SPLIT 5", 6" DECIDUOUS
10369	SPLIT 5", 6" DECIDUOUS
10370	7" DECIDUOUS
10374	6" DECIDUOUS
10375	7" DECIDUOUS
10376	SPLIT (2) 4", 6" DECIDUOUS
10379	6" DECIDUOUS
10380	6" DECIDUOUS
10381	SPLIT 5", 6" DECIDUOUS
10383	7" DECIDUOUS
10385	5", 7" DECIDUOUS
10387	9" DECIDUOUS
10388	7" DECIDUOUS
10389	8" DECIDUOUS
10390	7" DECIDUOUS
10392	8" DECIDUOUS
10402	9" DECIDUOUS
10403	SPLIT 3", 4" (2) 5" DECIDUOUS
10404	7" DECIDUOUS
10405	6" DECIDUOUS
10406	5" DECIDUOUS
10407	SPLIT 5", 6" DECIDUOUS
10408	SPLIT 6", 7" DECIDUOUS
10409	12" DECIDUOUS
12545	30" OAK
12547	15" DECIDUOUS
12548	7" DECIDUOUS
12549	7" DECIDUOUS
12550	7" DECIDUOUS
12551	7" DECIDUOUS
12552	11" DECIDUOUS
12553	9" DECIDUOUS
12554	7" DECIDUOUS
12555	8" DECIDUOUS
12556	9" DECIDUOUS
12557	7" DECIDUOUS
12559	10" DECIDUOUS
12560	7" DECIDUOUS
12561	7" DECIDUOUS
12562	8" DECIDUOUS
12563	9" DECIDUOUS
12564	7" DECIDUOUS
12565	8" DECIDUOUS
12566	8" DECIDUOUS
12567	8" DECIDUOUS
12673	SPLIT 18", 24", 28" OAK
12706	7" DECIDUOUS
12707	SPLIT 9", 11" DECIDUOUS
12712	SPLIT 7", 8" 10" DECIDUOUS
12713	7" DECIDUOUS
12714	SPLIT 4" (2) 5", 7" DECIDUOUS
12741	24" OAK
12742	SPLIT 14", 15" OAK
12841	11" OAK
12892	SPLIT 8", 10", 13", 16" OAK
12985	SPLIT 13", 14" OAK
12987	SPLIT 13", 14" OAK
13004	16" OAK
13005	SPLIT 8", 12", 14", 15" OAK
13008	10" OAK
13007	SPLIT 6", 8" OAK
13009	26" OAK
13010	15" OAK
13011	24" OAK
13013	20" OAK
13015	16" OAK

TREE PROTECTION FENCE


TREE PROTECTION FENCE

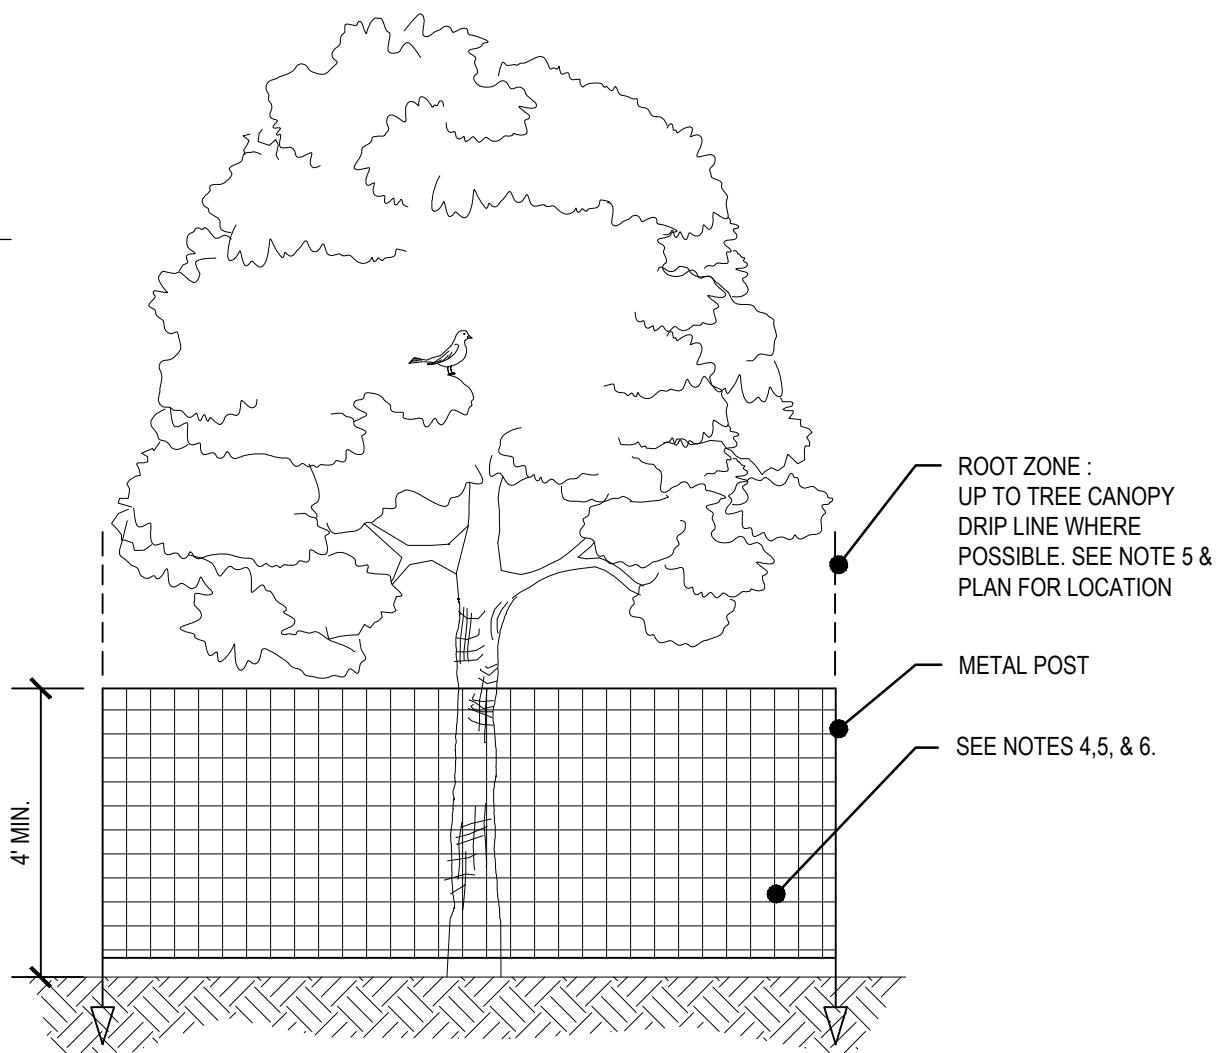

1 TREE PROTECTION FENCING DETAIL
N.T.S.

TREE PROTECTION NOTES:

- BEFORE WORK IS STARTED, INSTALL TREE PROTECTION FENCING. CONTACT THE PROJECT ARBORIST FOR ASSISTANCE.
- NO ENCROACHMENT OF ANY KIND IS ALLOWED WITHIN THE TREE PROTECTION FENCE ZONE DURING CONSTRUCTION.
- INSTALL FENCE ON TREE SIDE OF EXISTING CURB FOR ALL TREES TO BE PRESERVED. ROOT PROTECTION ZONE IS AN AREA AROUND A TREE THAT IS BASED ON THE DIAMETER OF THE TREE CANOPY AND BETWEEN EXISTING CURB AND PROPOSED SIDEWALK.
- FENCING SHALL BE 4-FOOT HIGH ORANGE CONSTRUCTION FENCE WITH METAL POSTS AND BE SECURED TO THE GROUND WITH 6-FOOT METAL POSTS. AVOID DRIVING POSTS OR STAKES INTO MAJOR ROOTS.
- FENCE SHALL BE INSTALLED PRIOR TO LAND CLEARING, FILLING OR ANY LAND ALTERATION AND SHALL REMAIN IN PLACE UNTIL AFTER CONSTRUCTION IS COMPLETE.
- NO EXCAVATION OR COMPACTION OF EARTH OR OTHER POTENTIALLY DAMAGING ACTIVITIES ALLOWED WITHIN THE PROTECTION FENCING.
- WORK WITHIN PROTECTION FENCE SHALL BE DONE MANUALLY. NO STOCKPILING OF MATERIALS, VEHICULAR TRAFFIC, OR STORAGE OF EQUIPMENT OR MACHINERY SHALL BE ALLOWED WITHIN THE LIMITS OF THE FENCING.
- WITHIN CLEARING/GRADING LIMITS OR AT THE EDGE OF THE CLEARING/GRADING LIMITS, TREE PROTECTION MAY BE INSTALLED AROUND GROUPS OF TREES.
- DURING WORK, ANY ROOTS GREATER THAN TWO INCHES FOUND DURING EXCAVATION SHALL BE CLEANLY CUT. MULTIPLE ROOT PRUNING EVENTS FOR SINGLE TREES SHALL BE MANAGED & MONITORED BY THE PROJECT LANDSCAPE ARCHITECT.
- AFTER CONSTRUCTION IS COMPLETE, PROJECT LANDSCAPE ARCHITECT SHALL VERIFY TREE PROTECTION FENCING CAN BE REMOVED.

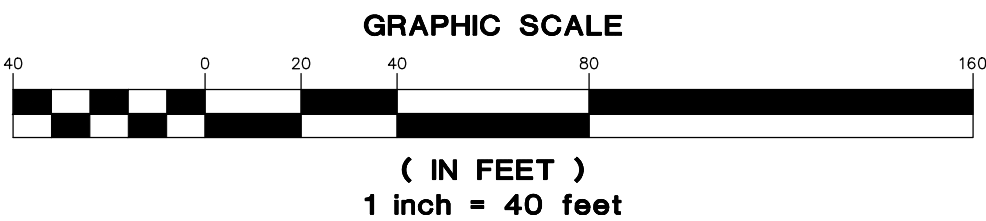

SHEET TITLE
TREE REMOVAL
& PROTECTION
PLAN

DATE: 02/11/22

DRAWN: KPM

CHECKED: CNH

REVISIONS:

© AAI ENGINEERING INC.
2022. ALL RIGHTS RESERVED

THESE DRAWINGS ARE THE
PROPERTY OF AAI ENGINEERING INC.
AND ARE NOT TO BE USED OR
REPRODUCED IN ANY MANNER
EXCEPT WITH THE PRIOR WRITTEN
PERMISSION OF AAI ENGINEERING INC.

SHEET NUMBER

L1.0

JOB NUMBER: A21166.10